


40W RGB+CCT Dimming Driver (2.4GHz)

Model No.: PL05

Manual




Features


- This product is made by 2.4G wireless transmitting technology with low consumption and strong ability to resist signal loss.
- Support 2.4G remote control. RGB, Saturation, Color temperature and brightness adjustable.
- Have DND mode, usually used in power failure area and save power.
- Compatible with "Tuya Smart" APP (need to purchase wifi box separately), more convenient for smart control.

Parameters

Model No.: PL05 Output Voltage: DC30-40V 2.4G RF Control Distance: 30m
Input Voltage: AC180-240V 50/60Hz Output Power (Max): 40W IP Rating: IP20
PF: >0.9 Ta: 50°C Tc: 85°C Constant Current Output: (R/G/B: 0.2A, CW/WW: 1A)

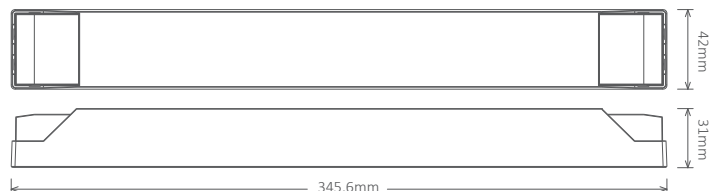

Connection Diagram

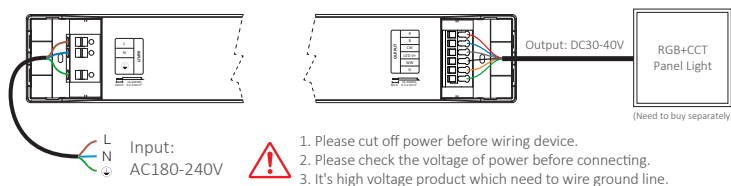

Linking code



4. Short press "1" 3 times within 3 seconds. Linking code is done if the lights flashes 3 times slowly.

⚠ Don't use "Master ON" to link code. You only can link lights into one zone on one remote.

Cleaning Code




4. Short press "1" 5 times within 3 seconds. Cleaning code is done if the lights flashes 6 times quickly.

Transmitting function instruction

One LED Driver can transmit the signals from the remote control to another LED Driver within 30m, as long as there is a LED Driver within 30m, the remote control distance can be limitless.

Dynamic modes auto synchronization

Multi lights can synchronize if they are in same dynamic mode and linked with same remote (distance between each light is within 30m)

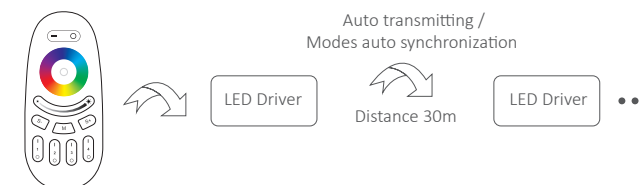

Dynamic mode table

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

Turn Do Not Disturb mode on and off (ON by default)

Turn on "Do Not Disturb" (applicable to areas with frequent power outages to save energy)

Turn on Do Not Disturb mode:

Short press the "OFF" button 3 times within 3 seconds, and then short press the "ON" button 3 times. The light flashes 4 times to indicate success.

Note: When the lamp is powered on again after a power outage, its status (lights on or off) will remain the same as before the power outage.

Turn off Do Not Disturb mode:

Short press the "ON" button 3 times within 3 seconds, and then short press the "OFF" button 3 times. The light flashes 4 times slowly to indicate successful shutdown.

Note: When the lamp is powered on again after a power outage, its status will be on by default.

Attention

1. Don't disassemble it if you are not expert.
2. Don't use it in metallic or magnetic area.



Made in China