

Light Measurement Report

Print date: 10-10-2024

Measurement date and time: 10-10-2024 16:20:53 – Measurement no. VFR-241010-1180-MS

Measurement tracking No. and Link: [VT241010-001345](#)

Operator:



Laboratory and Equipment

Laboratory Owner and Location

Goniospectrometer System and Type

Sensor Name, Calibr. Date and Serial No.

Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark

LabSpion – Type C, horizontal

LabSensor Model2 – 11-1-2024 – 3130191315

Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution

γ (gamma)-Resolution

Test Distance

Input Power, Power and Displ. Factors

Input RMS Voltage and Current

Frequency of Input Power

Warm-up Time and Variation

12 planes – 30°

5°

7,77 m

32,3 W – PF 0,95 – DPF 0,96

230 V – 0,148 A

50 Hz

Lamp stabilized in 15 min 1 sec – 2,0%

Tested Light Source

Product Name

Item No. and Manufacturer

Product Description (line 1)

273597-3000K

273597-3000K – Dutchfulfillment

SIDE-LIT LED PANEEL | LUNA | 60X60CM | 30W

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)

Efficiency

Peak Intensity and Beam Angle

Correlated Color Temperature, Target/Measured

Color Rendering Index

Color Rendering TM30-18

Color Shift, CIE duv and MacAdam Steps

Flicker

3757 lm – 0,58% / 99,42%

116 lm/W

1939 cd – 82,4°




CCT = 3000 K / 2886 K

CRI 82,3

R_f 84,8 – R_g 96,0

Duv -0,0004 – SDCM 4,1

SVM 0,01 – PstLM 0,01

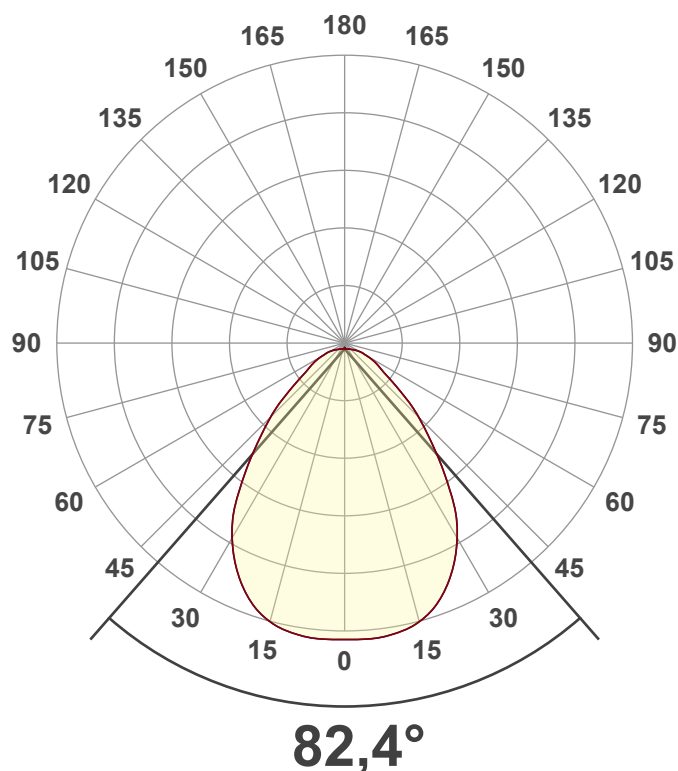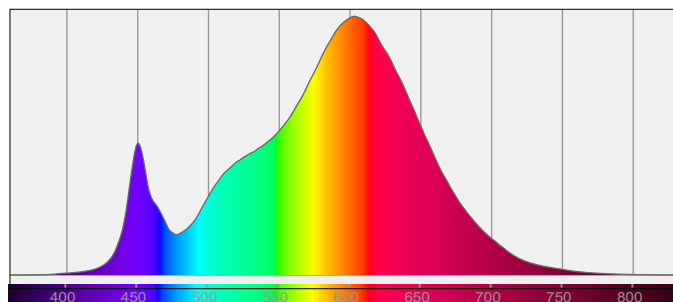

Light Measurement Report

Print date: 10-10-2024

Measurement date and time: 10-10-2024 16:20:53 – Measurement no. VFR-241010-1180-MS


Measurement tracking No. and Link: [VT241010-001345](#)

Operator:



Luminous Intensity diagram

Unit: 0-100% of peak intensity

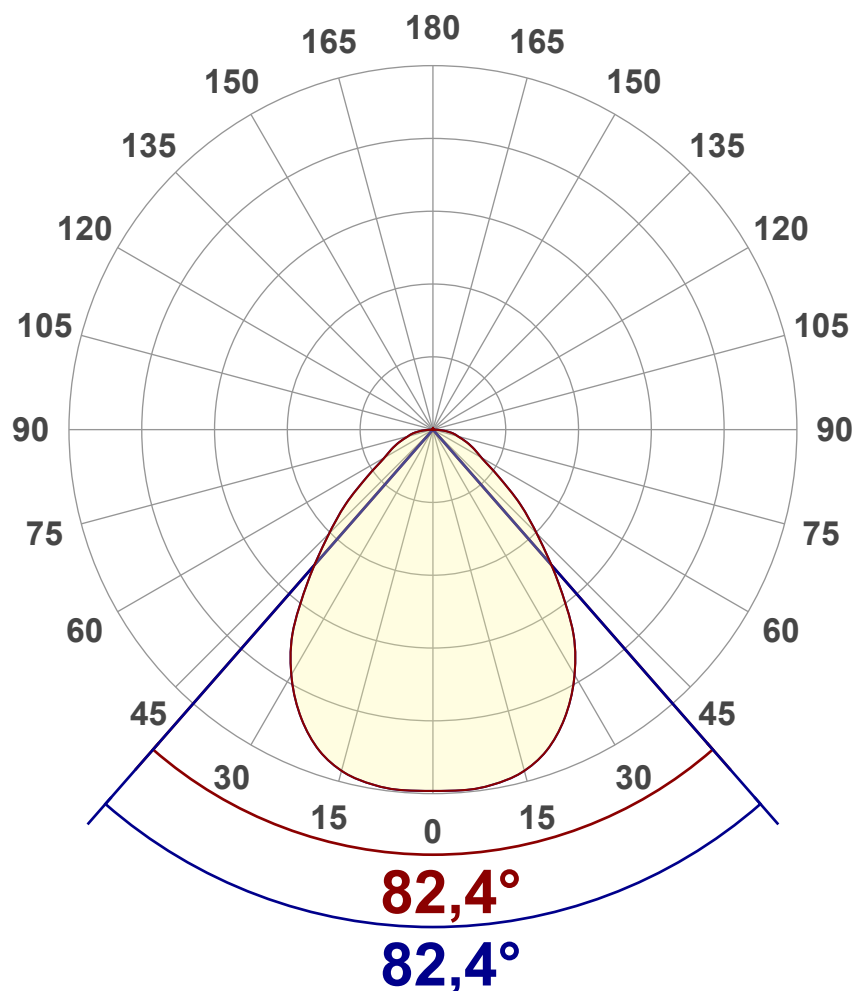

Main Values

Output (total Lumen)	3757 lm
Lumen Up% / Down%	0,58% / 99,42%
Peak Intensity	1939 cd
Beam Angle (50%)	82,4°
Beam Angle (90%)	82,4°
Beam Angle (10%)	82,4°

Cut-off Angle

Average 2,5%	171,2°
--------------	--------

Field Angle

Average 10%	138,9°
-------------	--------


Intensity Ratio

In 120° cone	87,5%
In 90° cone	69,8%

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

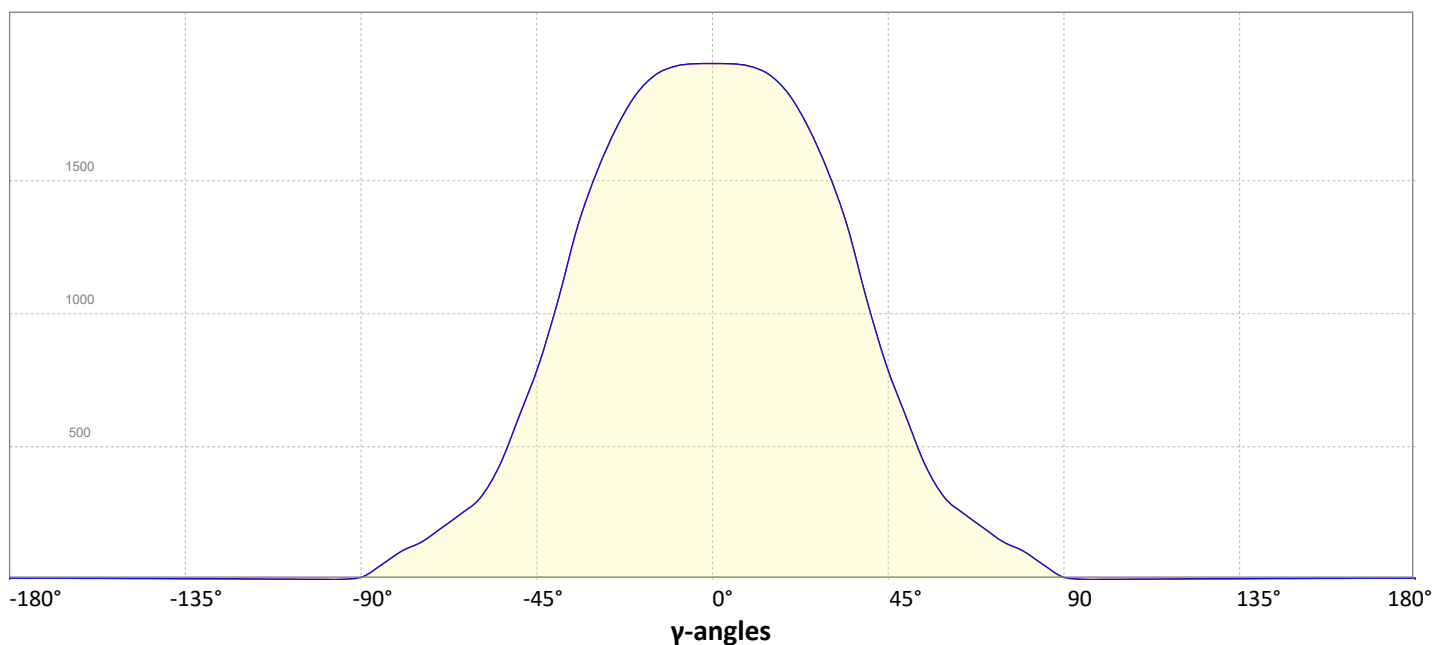

Light Measurement Report


Print date: 10-10-2024
Measurement date and time: 10-10-2024 16:20:53 – Measurement no. VFR-241010-1180-MS
Measurement tracking No. and Link: [VT241010-001345](#)
Operator:



Iso-intensity Diagram (Iso-candela)



Iso-illuminance Diagram (Iso-lux)

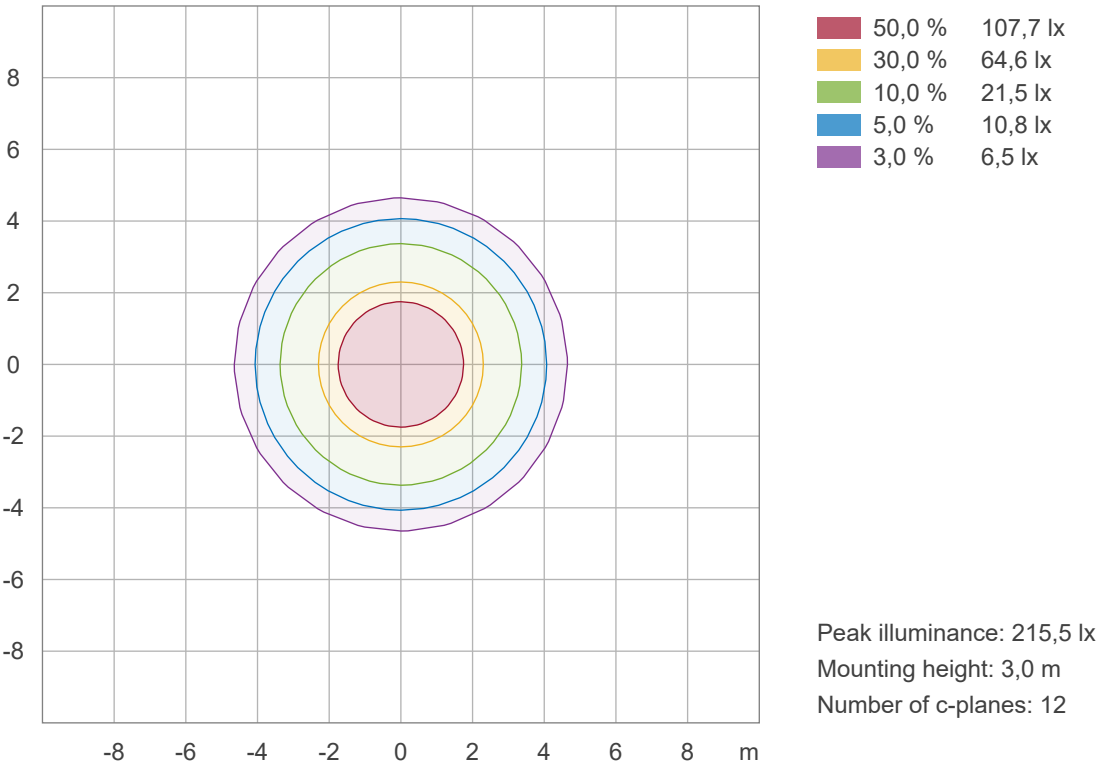

Light Measurement Report

Print date: 10-10-2024

Measurement date and time: 10-10-2024 16:20:53 – Measurement no. VFR-241010-1180-MS

Measurement tracking No. and Link: [VT241010-001345](#)

Operator:




Color details


Correlated Color Temperature, Target CCT = 3000 K
Correlated Color Temperature, Measured CCT = 2886 K
Color Rendering Index CRI 82,3
Color Rendering Index, R9 (red component) R9 = 3,8
Color Rendering TM30-18 R_f 84,8 – R_g 96,0
Color Quality Scale CQS = 81,8

MacAdam Steps
Color coordinates CIE 1931 (x;y) = (0,437;0,404)
Color coordinate CIEs 1960 (u;v) = (0,251;0,348)
Color deviation from BBL Duv = -0,0004
Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,251;0,521)


CIE 1931

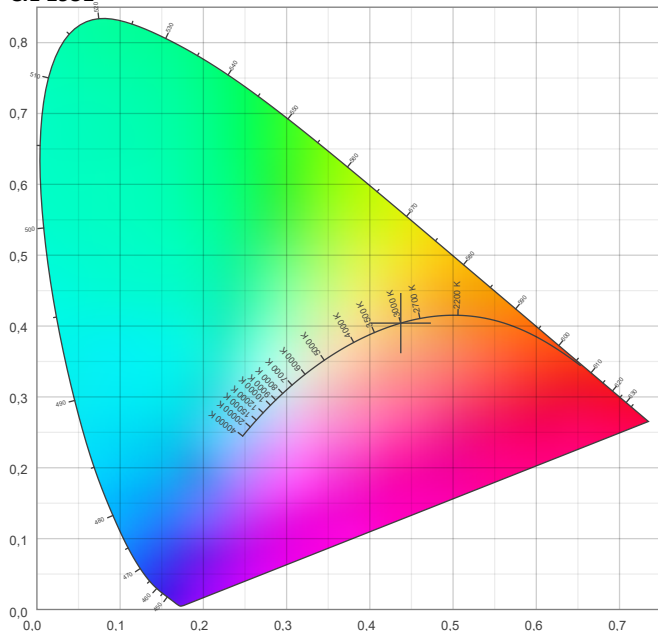

CIE 1931 – zoomed on Planckian locus

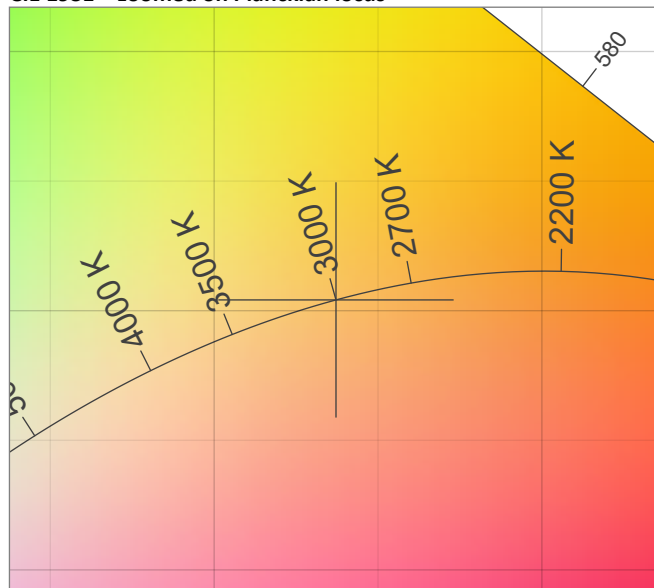


Color Rendering Index per reference color (CIE 1995)

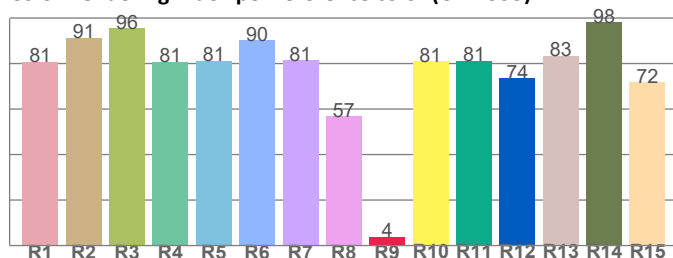


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80,8	91,3	95,5	80,7	81,3	90,3	81,4	56,8	3,8	81,0	81,1	73,6	83,4	98,2	71,9

Spectral power distribution (SPD) / W/nm – 0-100%

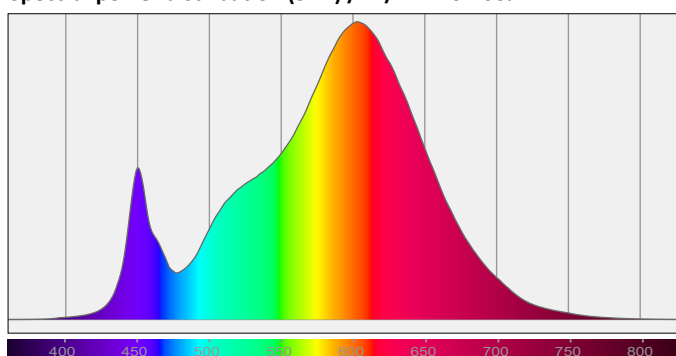


TM30-18 R_f -values per hue bin

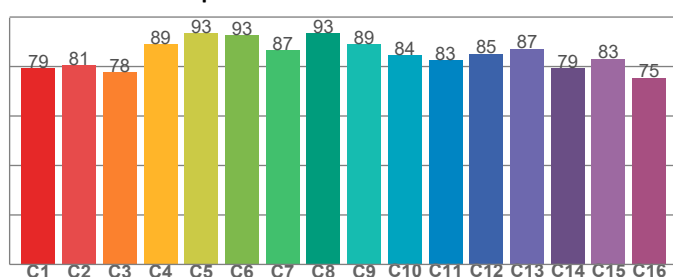

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79,3	80,5	77,7	89,0	93,4	92,6	86,6	93,5	89,1	84,5	82,5	85,2	87,1	79,3	83,1	75,4

Color Quality Scale by reference color

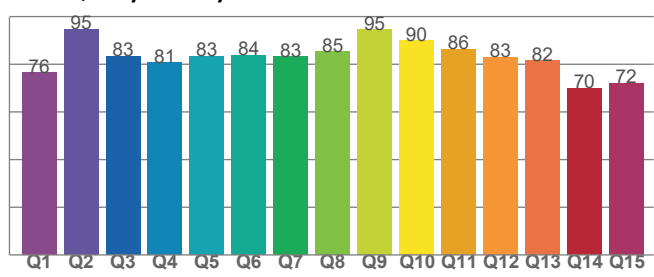

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
76,4	94,6	83,3	80,7	83,4	83,7	83,1	85,3	94,5	89,8	86,4	83,1	81,6	70,0	72,0

Light Measurement Report

Print date: 10-10-2024


Measurement date and time: 10-10-2024 16:20:53 – Measurement no. VFR-241010-1180-MS

Measurement tracking No. and Link: [VT241010-001345](#)

Operator:



Beam Details

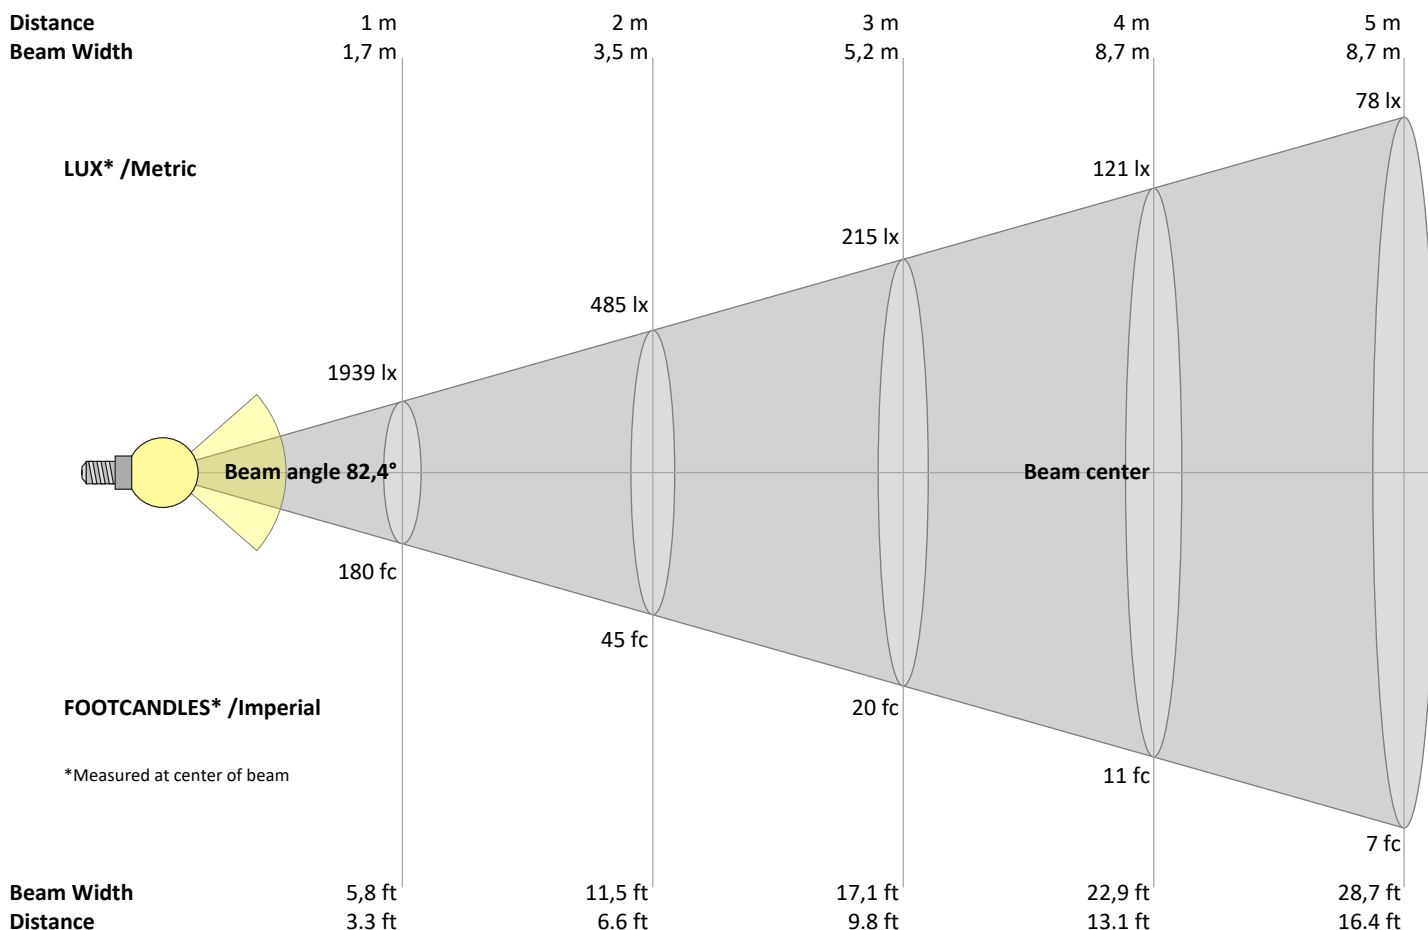

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
1939	485	215	121	78	54	40	30	24	19	16	13	11	10	9	8	7	6	5	5	lux
180,2	45	20	11,3	7,2	5	3,7	2,8	2,2	1,8	1,5	1,3	1,1	0,9	0,8	0,7	0,6	0,6	0,5	0,5	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
1939	1939	1927	1892	1813	1685	1516	1302	1028	788	596	418	301	242	188	138	103	54	11	2	cd
100%	100%	99%	98%	93%	87%	78%	67%	53%	41%	31%	22%	16%	12%	10%	7%	5%	3%	1%	0%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
1939	1939	1927	1892	1813	1685	1516	1302	1028	788	596	418	301	242	188	138	103	54	11	2	cd
100%	100%	99%	98%	93%	87%	78%	67%	53%	41%	31%	22%	16%	12%	10%	7%	5%	3%	1%	0%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
1939	1939	1927	1892	1813	1685	1516	1302	1028	788	596	418	301	242	188	138	103	54	11	2	cd
100%	100%	99%	98%	93%	87%	78%	67%	53%	41%	31%	22%	16%	12%	10%	7%	5%	3%	1%	0%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
1939	1939	1927	1892	1813	1685	1516	1302	1028	788	596	418	301	242	188	138	103	54	11	2	cd
100%	100%	99%	98%	93%	87%	78%	67%	53%	41%	31%	22%	16%	12%	10%	7%	5%	3%	1%	0%	of 0°val

Light Measurement Report

Print date: 10-10-2024

Measurement date and time: 10-10-2024 16:20:53 – Measurement no. VFR-241010-1180-MS

Measurement tracking No. and Link: [VT241010-001345](#)

Operator:



Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances											
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size											
H = mounting height above eye level											
X	Y	Viewed Crosswise					Viewed Endwise				
		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
2H	2H	14,8	15,8	15,0	16,1	16,3	14,8	15,8	15,0	16,1	16,3
	3H	15,6	16,7	16,0	16,9	17,1	15,6	16,7	16,0	16,9	17,1
	4H	16,0	17,1	16,4	17,3	17,6	16,0	17,1	16,4	17,3	17,6
	6H	16,6	17,5	16,9	17,7	18,1	16,6	17,5	16,9	17,7	18,1
	8H	16,7	17,6	17,1	17,9	18,3	16,7	17,6	17,1	17,9	18,3
	12H	16,9	17,7	17,2	18,1	18,5	16,9	17,7	17,2	18,1	18,5
4H	2H	15,0	16,1	15,4	16,3	16,6	15,0	16,1	15,4	16,3	16,6
	3H	16,2	17,0	16,6	17,4	17,8	16,2	17,0	16,6	17,4	17,8
	4H	16,7	17,5	17,2	17,9	18,5	16,7	17,5	17,2	17,9	18,5
	6H	17,4	18,1	17,9	18,5	18,8	17,4	18,1	17,9	18,5	18,8
	8H	17,6	18,3	18,1	18,7	19,1	17,6	18,3	18,1	18,7	19,1
	12H	17,8	18,4	18,3	18,8	19,3	17,8	18,4	18,3	18,8	19,3
8H	4H	17,0	17,7	17,5	18,0	18,4	17,0	17,7	17,5	18,0	18,4
	6H	17,8	18,3	18,3	18,8	19,3	17,8	18,3	18,3	18,8	19,3
	8H	18,2	18,6	18,7	19,2	19,8	18,2	18,6	18,7	19,2	19,8
	12H	18,5	18,9	19,1	19,4	20,0	18,5	18,9	19,1	19,4	20,0
12H	4H	17,0	17,6	17,5	18,0	18,5	17,0	17,6	17,5	18,0	18,5
	6H	17,9	18,3	18,4	18,9	19,5	17,9	18,3	18,4	18,9	19,5
	8H	18,3	18,7	18,9	19,2	19,8	18,3	18,7	18,9	19,2	19,8
Variations with the observer position for the luminaire spacings, S:											
S = 1.0H		0,2 / -0,3					0,2 / -0,3				
S = 1.5H		0,5 / -0,6					0,5 / -0,6				
S = 2.0H		1,1 / -0,8					1,1 / -0,8				

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR		(RCR: Room Cavity Ratio)			Room Values are expressed as percentage of Lumen delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	106	106	106	102	102	102	99	
1	110	106	102	99	108	104	101	98	100	97	94	96	93	91	92	90	89	87
2	102	95	89	84	99	93	88	83	89	85	81	86	82	79	83	80	77	75
3	94	85	78	73	92	84	77	72	81	75	71	78	73	69	75	71	68	66
4	87	77	69	63	85	76	69	63	73	67	62	71	66	61	69	64	60	58
5	81	70	62	56	79	69	61	56	67	60	55	65	59	55	63	58	54	52
6	76	64	56	50	74	63	55	50	61	54	50	60	54	49	58	53	49	47
7	71	59	51	45	69	58	50	45	56	50	45	55	49	44	54	48	44	42
8	66	54	46	41	65	53	46	41	52	45	41	51	45	40	50	44	40	38
9	62	50	43	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35
10	59	46	39	34	57	46	39	34	45	39	34	44	38	34	43	38	34	32

Light Measurement Report


Print date: 10-10-2024
Measurement date and time: 10-10-2024 16:20:53 – Measurement no. VFR-241010-1180-MS
Measurement tracking No. and Link: [VT241010-001345](#)
Operator:



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

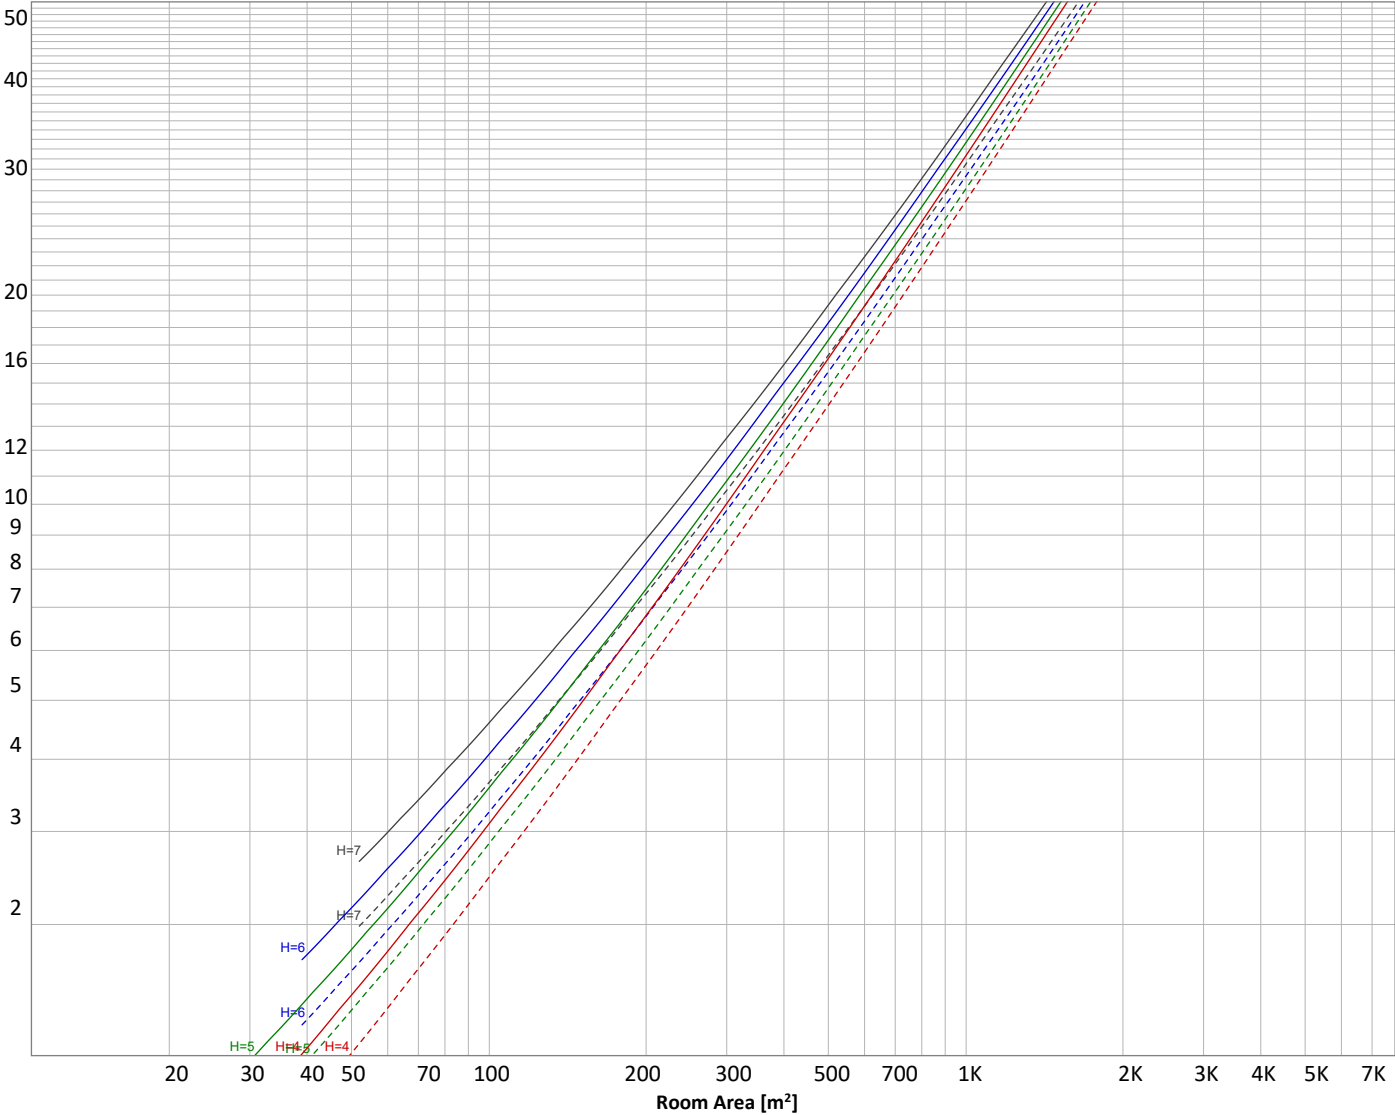

Conditions

H = Room height	Flux = 3757 lm	p(%)		
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	Wall reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50
E _{work} = Average lux on work area =	100 lx	-----	50	30
				Floor reflectance
				20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
185 lm	532 lm	771 lm	802 lm	613 lm	383 lm	240 lm	150 lm	59,4 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
4,15 lm	1,93 lm	2,50 lm	2,97 lm	2,97 lm	2,84 lm	2,31 lm	1,52 lm	0,535 lm

Light Measurement Report

Print date: 10-10-2024
Measurement date and time: 10-10-2024 16:20:53 – Measurement no. VFR-241010-1180-MS
Measurement tracking No. and Link: [VT241010-001345](#)
Operator:



Outdoor Light Planning

Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	185 lm	4,9%
10-20°	532 lm	14,2%
20-30°	771 lm	20,5%
30-40°	802 lm	21,3%
40-50°	613 lm	16,3%
50-60°	383 lm	10,2%
60-70°	240 lm	6,4%
70-80°	150 lm	4,0%
80-90°	59 lm	1,6%
90-100°	4 lm	0,1%
100-110°	2 lm	0,1%
110-120°	3 lm	0,1%
120-130°	3 lm	0,1%
130-140°	3 lm	0,1%
140-150°	3 lm	0,1%
150-160°	2 lm	0,1%
160-170°	2 lm	0,0%
170-180°	1 lm	0,0%
Total	3757 lm	100,0%

Intensity peaks

Max intensity	1939 cd
Intensity, 90°	11 cd
Intensity, 0°	1939 cd

Zonal Lumen summary


Zone (γ)	Lumen	% Total
0-30°	1488 lm	39,6%
0-40°	2290 lm	61,0%
0-60°	3286 lm	87,5%
60-90°	450 lm	12,0%
70-100°	213 lm	5,7%
90-120°	9 lm	0,2%
0-90°	3736 lm	99,4%
90-180°	22 lm	0,6%
0-180°	3757 lm	100,0%

BUG rating

	Lumen	% Total
Forward light		
Low(0-30°)	744 lm	19,8%
Medium(30-60°)	899 lm	23,9%
High(60-80°)	195 lm	5,2%
Very high(80-90°)	30 lm	0,8%
Back light		
Low(0-30°)	744 lm	19,8%
Medium(30-60°)	899 lm	23,9%
High(60-80°)	195 lm	5,2%
Very high(80-90°)	30 lm	0,8%
Uplight		
Low(90-100°)	4 lm	0,1%
High(100-180°)	18 lm	0,5%

IESNA TM-15-07
Luminaire Classification System
For Outdoor Luminaires

BUG rating B2 U2 G1

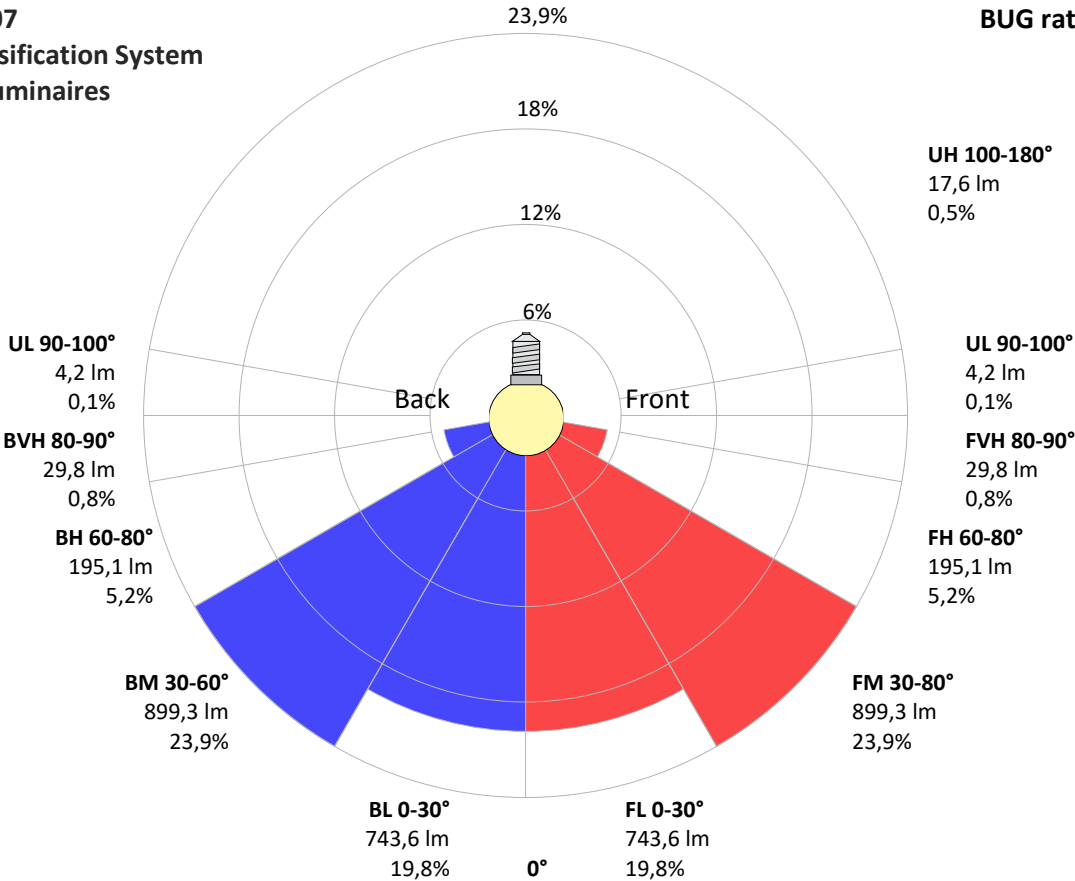

Light Measurement Report

Print date: 10-10-2024
Measurement date and time: 10-10-2024 16:20:53 – Measurement no. VFR-241010-1180-MS
Measurement tracking No. and Link: [VT241010-001345](#)
Operator:




Power Details


Input Power

Power feed to light source	32,3 W
Frequency of input power	50 Hz
RMS Input voltage feed, V_{RMS}	230 V
RMS Input current feed, I_{RMS}	0,148 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	34,08 VA
Displacement factor of AC power feed	0,96
Power factor of AC current feed	0,95
Total harmonic distortion of the current	8,79%
Total harmonic distortion of the voltage	0,06%

Input Power Curve

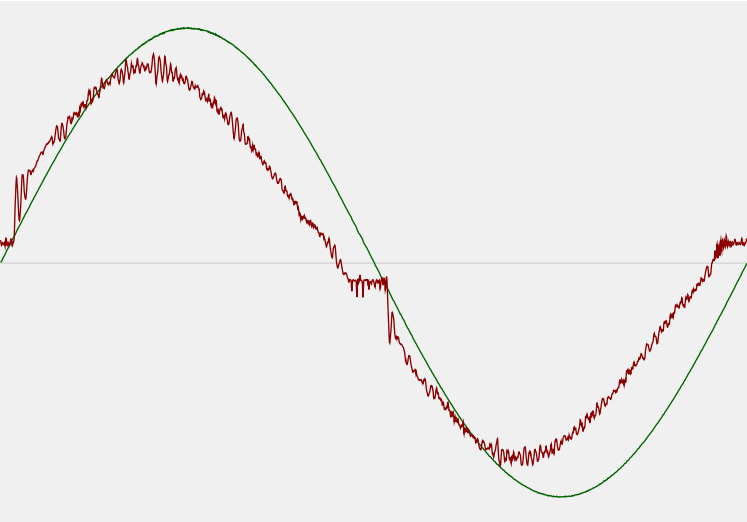

Efficiency

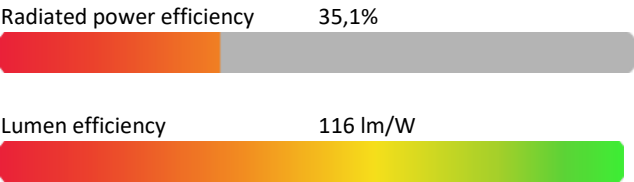

Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

Color Temperature Change

CCT start	2996 K
CCT shift	+4 K
CCT end	3000 K


Warmup Result

Total warmup time	Lamp stabilized in 15 min 1 sec
Warmup variation	-0,6%

Output Change

Output start	3779 lm
Output change	-22 lm
Output end	3757 lm

Stabilization Curve

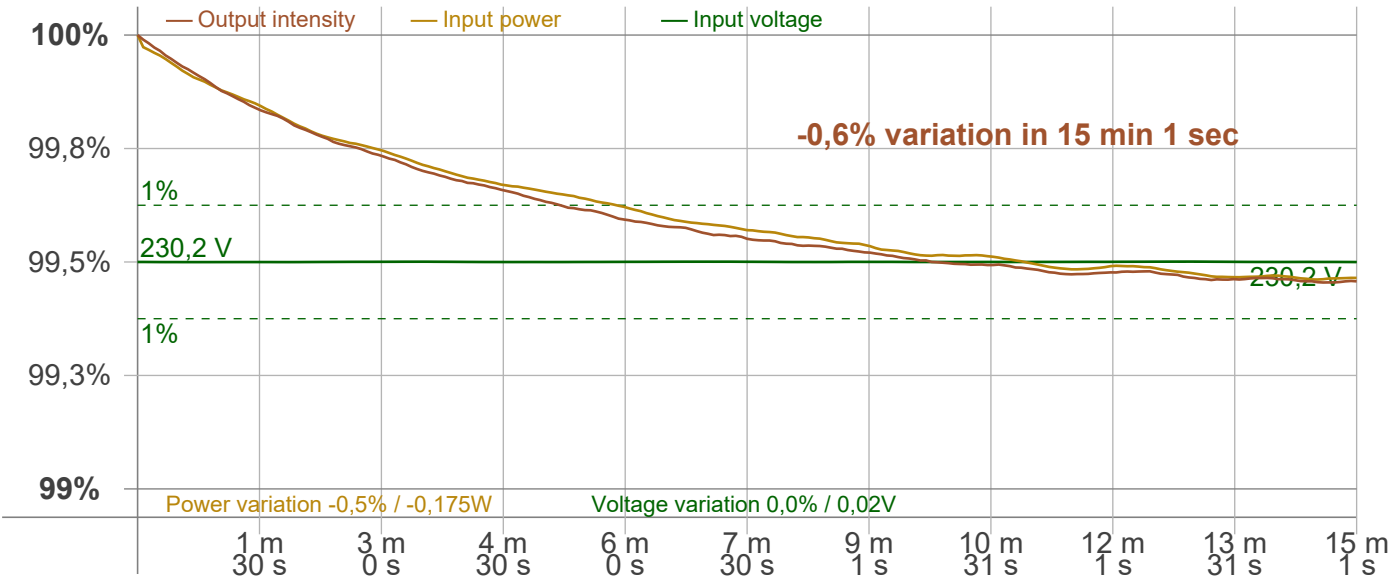

Light Measurement Report


Print date: 10-10-2024
Measurement date and time: 10-10-2024 16:20:53 – Measurement no. VFR-241010-1180-MS
Measurement tracking No. and Link: [VT241010-001345](#)
Operator:



Flicker /TLA details

Flicker Meter Type	Viso Systems LabFlicker	Measurement time	
Frequency of input power	50 Hz	PstLM	180 sec
Flicker/TLA sample rate	20000 samples/s	All other indices	1,2 sec
Flicker indices according to Illuminating Engineering Society (IES)		Flicker indices according to California Energy Commission (CEC) 2016b	
Flicker frequency	97,09 Hz	JA8/10 40 Hz	0,02 %
Percent Flicker	0,21 %	JA8/10 90 Hz	0,03 %
Flicker index	0	JA8/10 200 Hz	0,18 %
TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)		JA8/10 400 Hz	0,19 %
PstLM value (F < 80 Hz)	0,01	JA8/10 1000 Hz	0,2 %
SVM value (80 < F < 2000 Hz)	0,01	Flicker indices according to Lighting Research Center (2015)	
		Perception metric, Assist Mp	0,01

Flicker frame (frame of one flicker period in time domain)

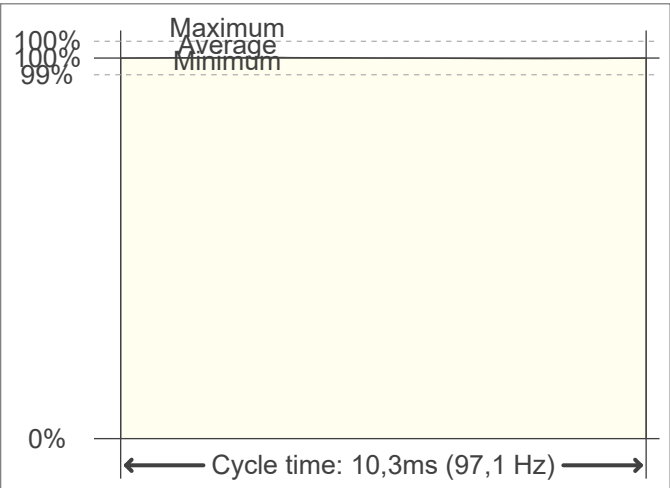

Flicker FFT (flicker curve in frequency domain)



IEEE 1789 Frequency/modulation plot

