MANUAL

REMOTE CONTROL FOR TRI-PROOF | LYNN | MICROWAVE SENSOR

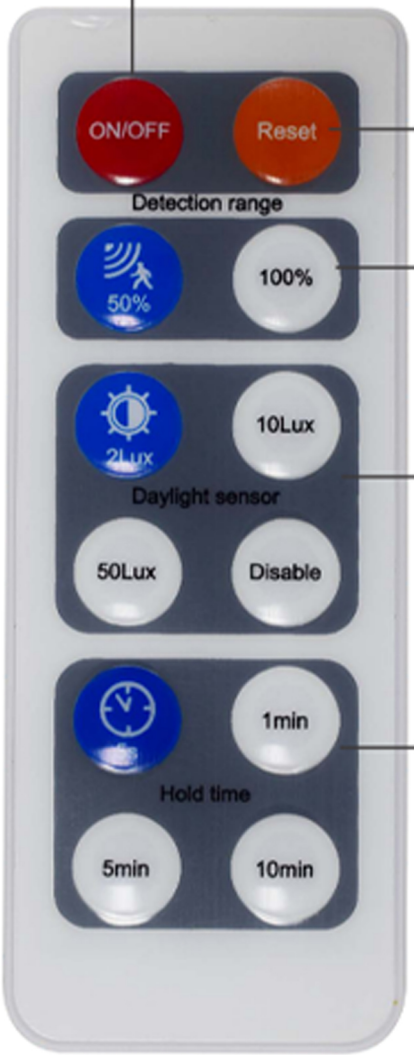

On/off

1. "ON/OFF" key only functions as a switch of the light.
2. If press this button to turn off the lamp before it's short-circuited, the lamp will

Reset

Press "Reset" button, products with DIP switch will be again controlled by DIP switches; otherwise all the setting will be just initial, that is 100% detection range,hold time 5S, daylight threshold disabled.

Detection area

(Press 50%/100% button to define detection area.)

Daylight threshold

(Press 2lux/10lux/50lux/disable to define daylight level.)
Note: Disable means light will be turned on once sensor detects movement, regardless of the ambient lux.

Hold time

(Press 5s / 1min / 5min / 10min to define holdtime.)