

Light Measurement Report

Print date: 22-1-2025

Measurement date and time: 22-1-2025 14:17:00 – Measurement no. VFR-250122-3056-MS

Measurement tracking No. and Link: [VT250122-001102](https://www.viso-systems.com/VT250122-001102)

Operator:



Laboratory and Equipment

Laboratory Owner and Location
Goniospectrometer System and Type
Sensor Name, Calibr. Date and Serial No.
Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark
LabSpion – Type C, horizontal
LabSensor Model2 – 11-1-2024 – 3130191315
Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution
 γ (gamma)-Resolution
Test Distance
Input Power, Power and Displ. Factors
Input RMS Voltage and Current
Frequency of Input Power
Warm-up Time and Variation

28 planes – 12,86°
5°
3,65 m
198,5 W – PF 0,99 – DPF 1,0
230 V – 0,869 A
50 Hz
Lamp stabilized in 17 min 51 sec – 2,0%

Tested Light Source



Product Name
Item No. and Manufacturer
Product Description (line 1)

270831-4000K
270831-4000K – Dutchfulfillment
LED HIGHBAY NIX | 1-10V | DIM | 200 WATT | PHILIPS DRIVER | 90°

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)
Efficiency
Peak Intensity and Beam Angle
Correlated Color Temperature, Target/Measured
Color Rendering Index
Color Rendering TM30-18
Color Shift, CIE duv and MacAdam Steps
Flicker

26447 lm – 0,17% / 99,83%
133 lm/W
12830 cd – 86,7°
CCT = 4000 K / 4040 K
CRI 71,3
 R_f 73,7 – R_g 92,2
Duv -0,0001 – SDCM 0,9
SVM 0,01 – PstLM 0,04

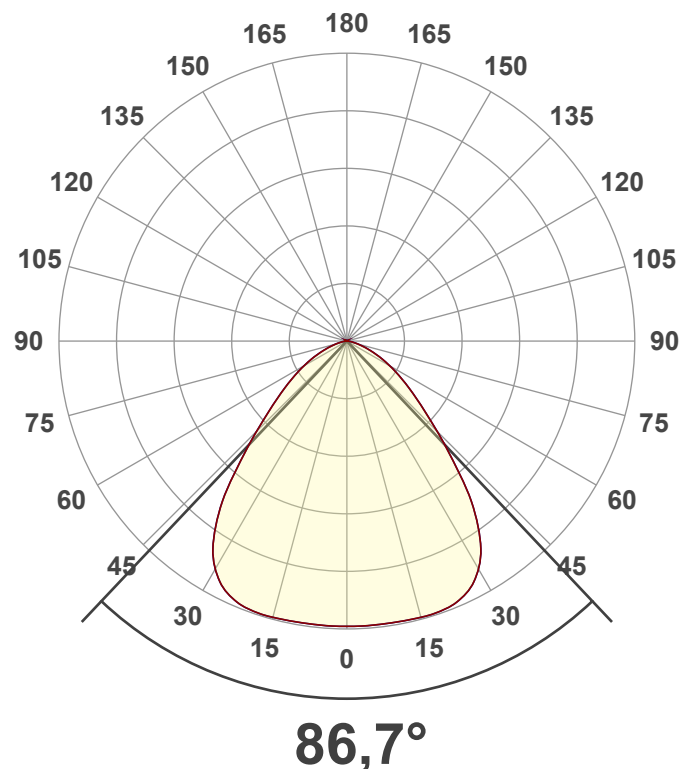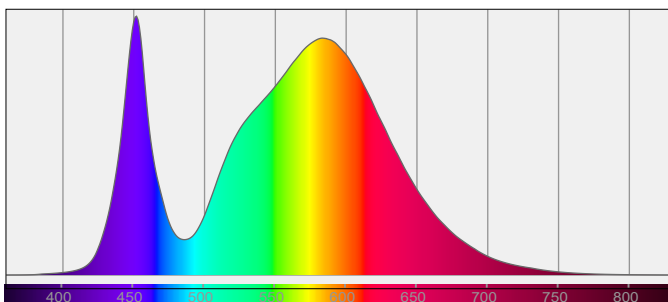

Light Measurement Report

Print date: 22-1-2025

Measurement date and time: 22-1-2025 14:17:00 – Measurement no. VFR-250122-3056-MS


Measurement tracking No. and Link: [VT250122-001102](#)

Operator:



Luminous Intensity diagram

Unit: 0-100% of peak intensity

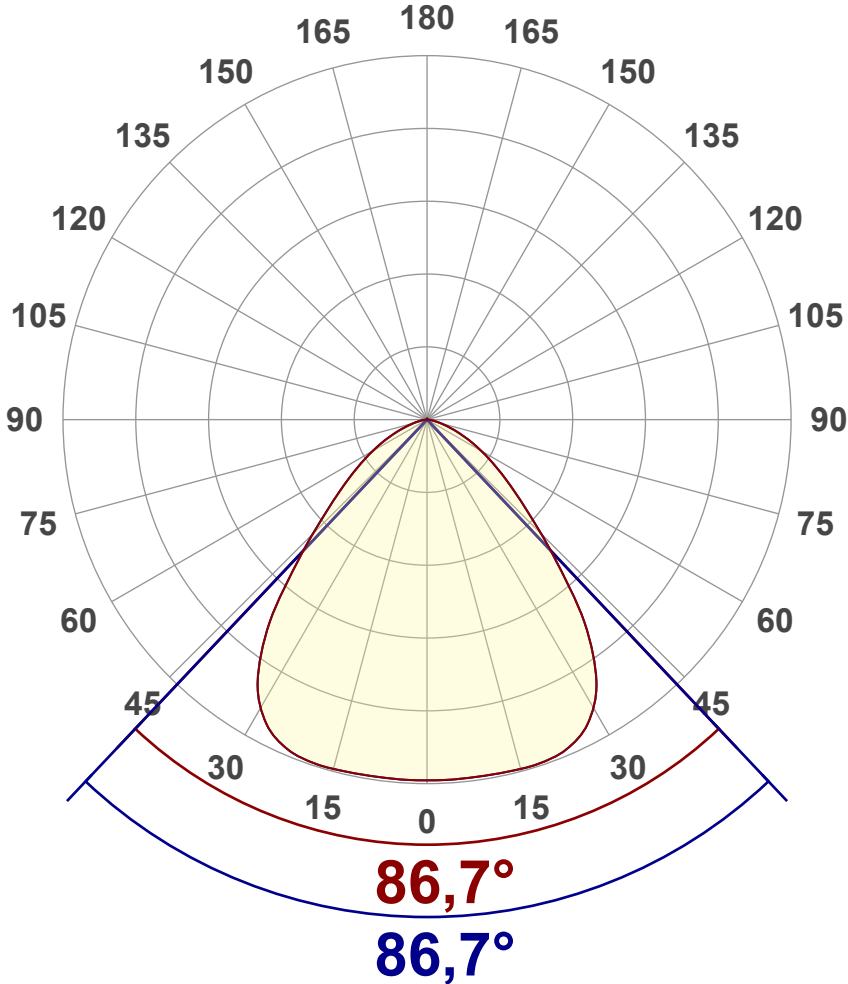

Main Values

Output (total Lumen)	26447 lm
Lumen Up% / Down%	0,17% / 99,83%
Peak Intensity	12830 cd
Beam Angle (50%)	86,7°
Beam Angle (90%)	86,7°
Beam Angle (10%)	86,7°

Cut-off Angle

Average 2,5%	156,7°
--------------	--------

Field Angle

Average 10%	133,8°
-------------	--------


Intensity Ratio

In 120° cone	91,6%
In 90° cone	73,7%

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ -angle

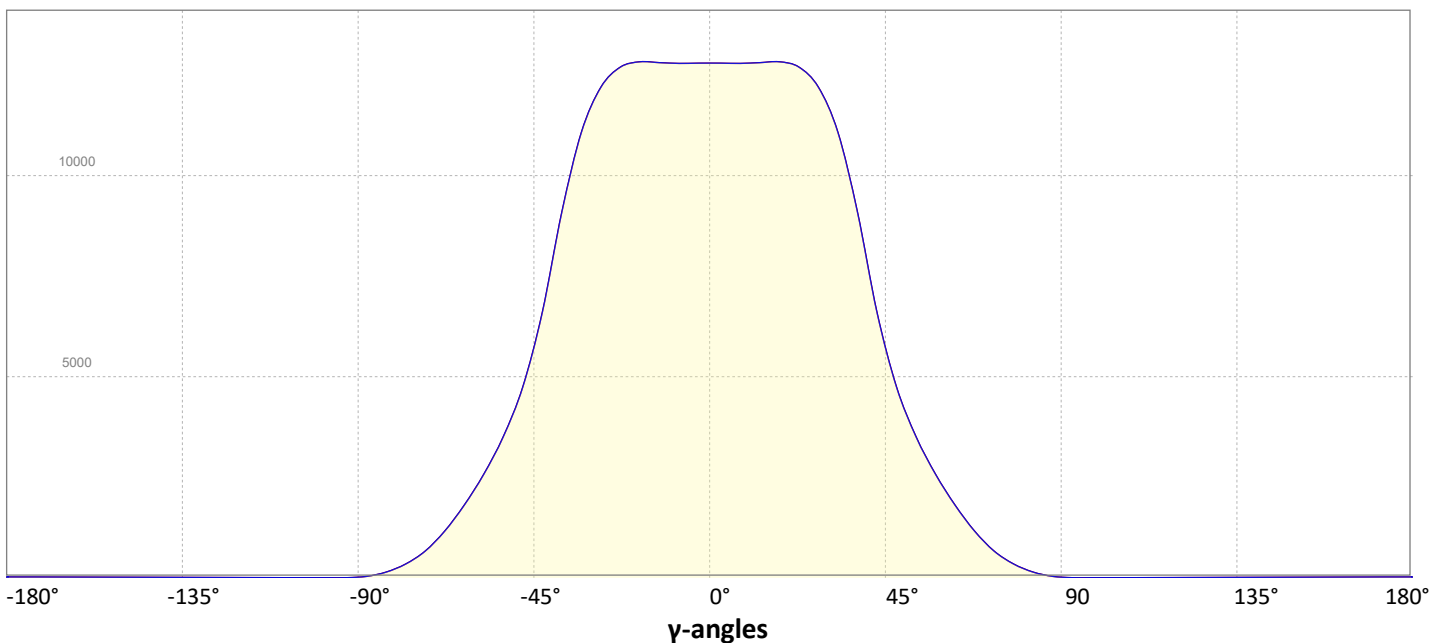

Light Measurement Report

Print date: 22-1-2025


Measurement date and time: 22-1-2025 14:17:00 – Measurement no. VFR-250122-3056-MS

Measurement tracking No. and Link: [VT250122-001102](https://www.viso-systems.com/VT250122-001102)

Operator:



Iso-intensity Diagram (Iso-candela)

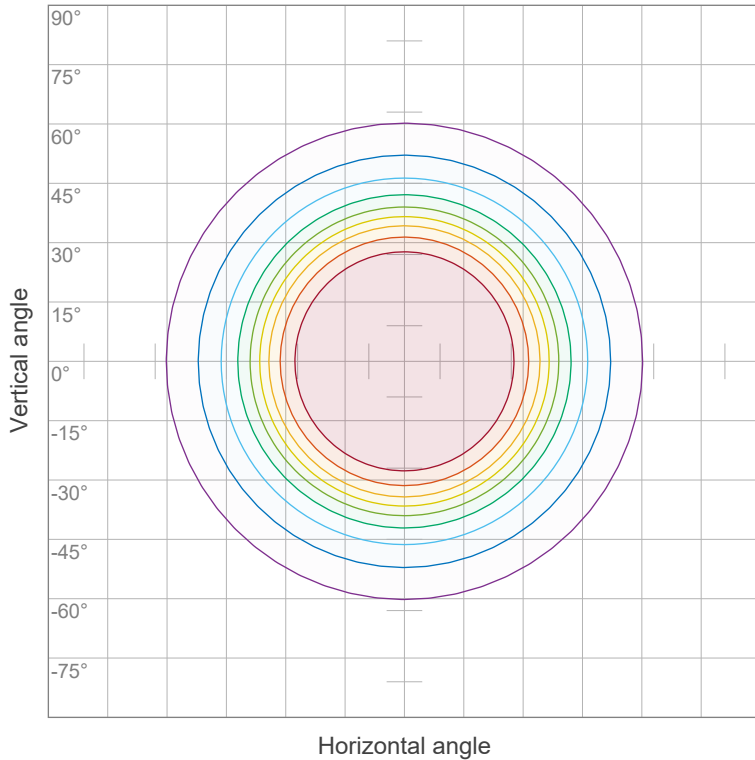


90 %	11543,4 cd
80 %	10260,8 cd
70 %	8978,2 cd
60 %	7695,6 cd
50 %	6413,0 cd
40 %	5130,4 cd
30 %	3847,8 cd
20 %	2565,2 cd
10 %	1282,6 cd

Peak intensity: 12826,0 cd

Number of c-planes: 28

Iso-illuminance Diagram (Iso-lux)

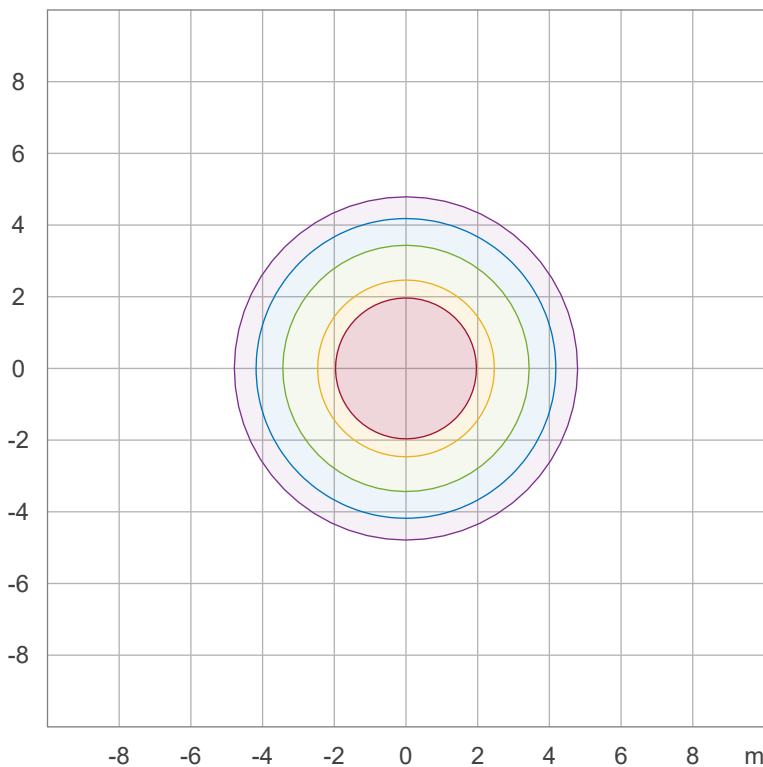

50,0 %	710,9 lx
30,0 %	426,5 lx
10,0 %	142,2 lx
5,0 %	71,1 lx
3,0 %	42,7 lx

Peak illuminance: 1421,7 lx

Mounting height: 3,0 m

Number of c-planes: 28

Light Measurement Report

Print date: 22-1-2025

Measurement date and time: 22-1-2025 14:17:00 – Measurement no. VFR-250122-3056-MS

Measurement tracking No. and Link: [VT250122-001102](https://www.viso-systems.com/VT250122-001102)

Operator:




Color details


Correlated Color Temperature, Target CCT = 4000 K
 Correlated Color Temperature, Measured CCT = 4040 K
 Color Rendering Index CRI 71,3
 Color Rendering Index, R9 (red component) R9 = -38,1
 Color Rendering TM30-18 R_f 73,7 – R_g 92,2
 Color Quality Scale CQS = 69,9

MacAdam Steps
 Color coordinates CIE 1931 (x;y) = (0,381;0,377)
 Color coordinate CIEs 1960 (u;v) = (0,225;0,334)
 Color deviation from BBL Duv = -0,0001
 Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,225;0,502)


CIE 1931

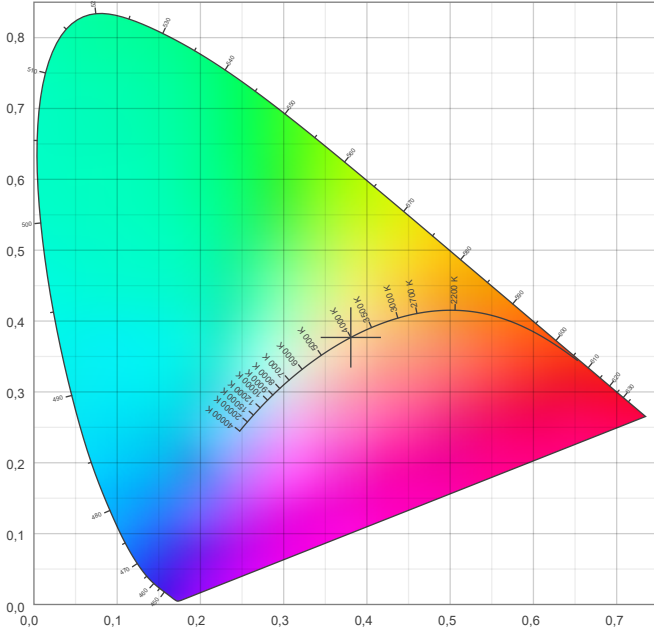

CIE 1931 – zoomed on Planckian locus

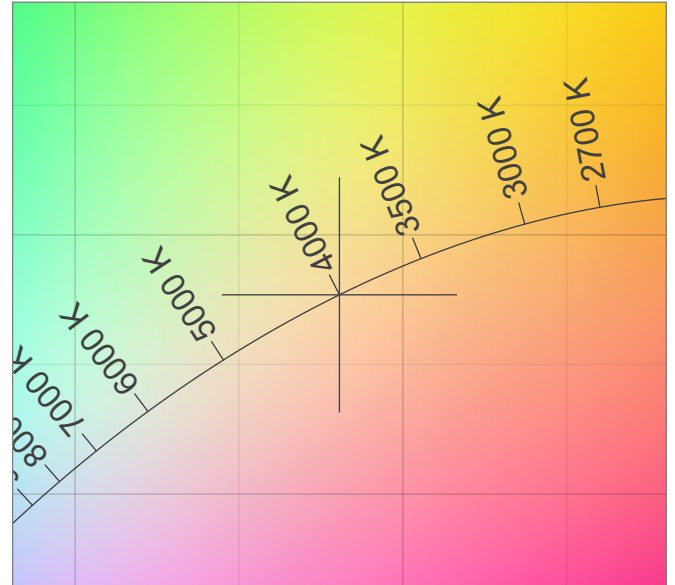


Color Rendering Index per reference color (CIE 1995)

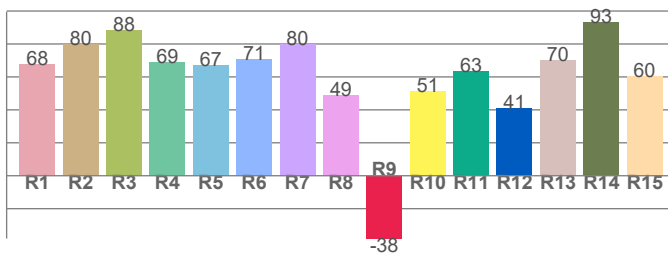


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
67,7	79,6	88,2	68,7	67,2	70,5	80,0	48,8	-38,1	51,2	63,2	40,8	70,1	93,4	60,2

Spectral power distribution (SPD) / W/nm – 0-100%

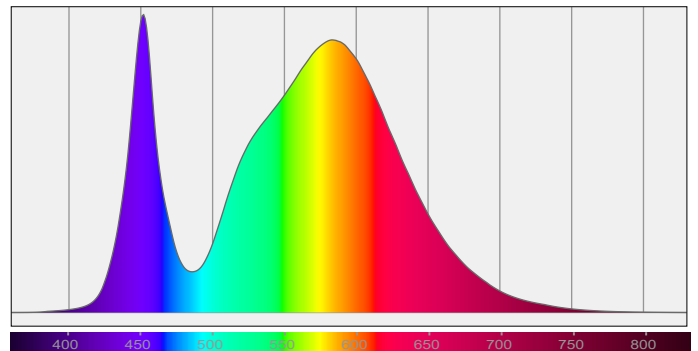


TM30-18 Rf-values per hue bin

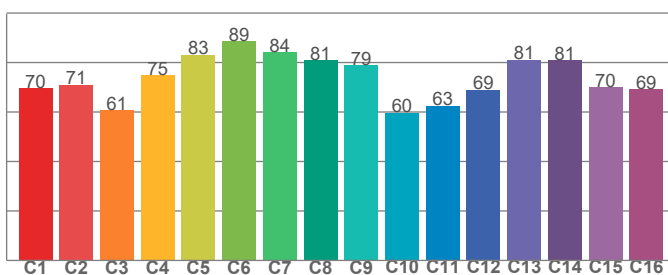

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
69,6	71,0	60,8	74,9	83,2	88,6	84,3	80,9	78,8	59,7	62,6	68,9	81,1	80,9	70,0	69,2

Color Quality Scale by reference color

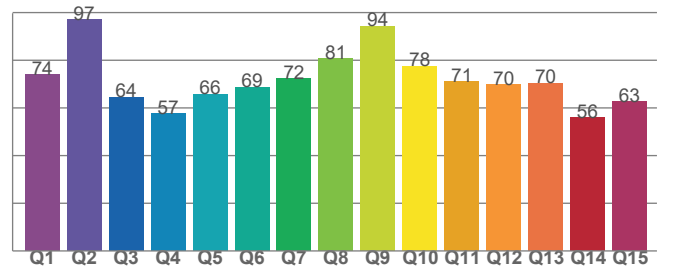

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
73,9	97,0	64,4	57,5	65,9	68,7	72,3	80,7	94,3	77,6	70,9	69,7	70,5	56,0	62,5

Light Measurement Report

Print date: 22-1-2025


Measurement date and time: 22-1-2025 14:17:00 – Measurement no. VFR-250122-3056-MS

Measurement tracking No. and Link: [VT250122-001102](https://www.viso-systems.com/VT250122-001102)

Operator:



Beam Details

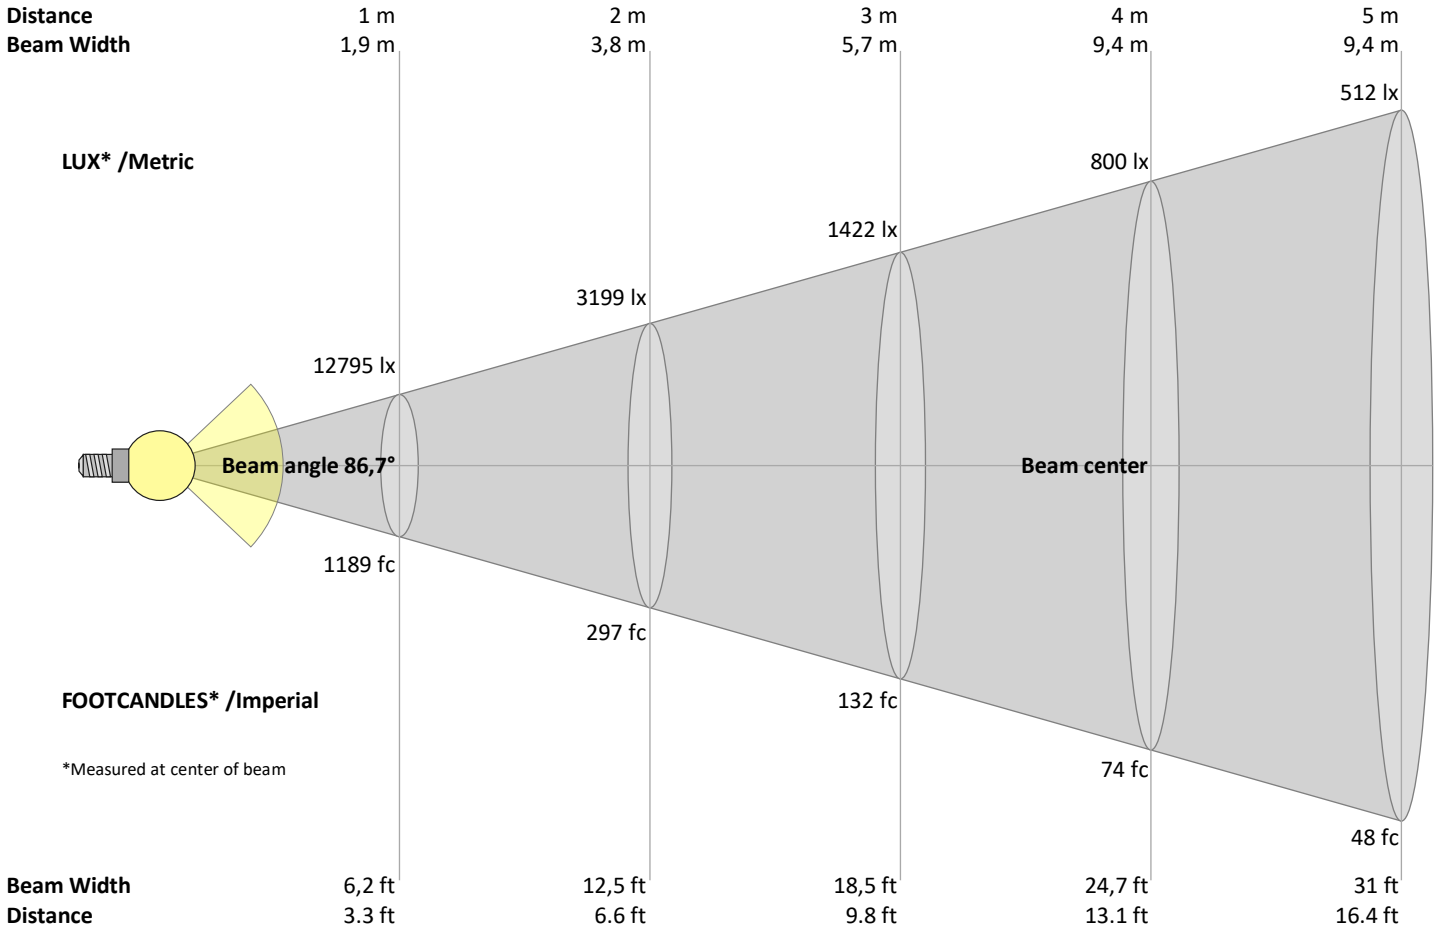

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
12795	3199	1422	800	512	355	261	200	158	128	106	89	76	65	57	50	44	39	35	32	lux
1188,7	297,2	132,1	74,3	47,5	33	24,3	18,6	14,7	11,9	9,8	8,3	7	6,1	5,3	4,6	4,1	3,7	3,3	3	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
12,8K	12,8K	12,8K	12,8K	12,8K	12,5K	11,7K	10,2K	8,0K	5,8K	4,2K	3,1K	2,2K	1,5K	0,9K	0,5K	0,3K	0,1K	0,0K	0,0K	cd
100%	100%	100%	100%	100%	98%	92%	80%	63%	45%	33%	24%	18%	12%	7%	4%	2%	1%	0%	0%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
12,8K	12,8K	12,8K	12,8K	12,8K	12,5K	11,7K	10,2K	8,0K	5,8K	4,2K	3,1K	2,2K	1,5K	0,9K	0,5K	0,3K	0,1K	0,0K	0,0K	cd
100%	100%	100%	100%	100%	98%	92%	80%	63%	45%	33%	24%	18%	12%	7%	4%	2%	1%	0%	0%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
12,8K	12,8K	12,8K	12,8K	12,8K	12,5K	11,7K	10,2K	8,0K	5,8K	4,2K	3,1K	2,2K	1,5K	0,9K	0,5K	0,3K	0,1K	0,0K	0,0K	cd
100%	100%	100%	100%	100%	98%	92%	80%	63%	45%	33%	24%	18%	12%	7%	4%	2%	1%	0%	0%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
12,8K	12,8K	12,8K	12,8K	12,8K	12,5K	11,7K	10,2K	8,0K	5,8K	4,2K	3,1K	2,2K	1,5K	0,9K	0,5K	0,3K	0,1K	0,0K	0,0K	cd
100%	100%	100%	100%	100%	98%	92%	80%	63%	45%	33%	24%	18%	12%	7%	4%	2%	1%	0%	0%	of 0°val

Light Measurement Report

Print date: 22-1-2025

Measurement date and time: 22-1-2025 14:17:00 – Measurement no. VFR-250122-3056-MS

Measurement tracking No. and Link: [VT250122-001102](#)

Operator:



Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
	ρ Ceiling	70	70	50	50	30	70	70	50	50	30
	ρ Walls	50	30	50	30	30	50	30	50	30	30
	ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	31,1	32,1	31,3	32,4	32,6	31,1	32,1	31,3	32,4	32,6
	3H	31,4	32,5	31,8	32,7	32,9	31,4	32,5	31,8	32,7	32,9
	4H	31,5	32,5	31,9	32,8	33,1	31,5	32,5	31,9	32,8	33,1
	6H	31,6	32,5	31,9	32,8	33,2	31,6	32,5	31,9	32,8	33,2
	8H	31,6	32,4	31,9	32,8	33,2	31,6	32,4	31,9	32,8	33,2
	12H	31,6	32,4	31,9	32,7	33,2	31,6	32,4	31,9	32,7	33,2
4H	2H	31,2	32,2	31,6	32,5	32,7	31,2	32,2	31,6	32,5	32,7
	3H	31,8	32,6	32,2	33,0	33,4	31,8	32,6	32,2	33,0	33,4
	4H	31,9	32,7	32,4	33,1	33,6	31,9	32,7	32,4	33,1	33,6
	6H	32,0	32,7	32,5	33,1	33,4	32,0	32,7	32,5	33,1	33,4
	8H	32,0	32,6	32,5	33,0	33,4	32,0	32,6	32,5	33,0	33,4
	12H	32,0	32,5	32,5	32,9	33,4	32,0	32,5	32,5	32,9	33,4
8H	4H	31,9	32,6	32,4	33,0	33,3	31,9	32,6	32,4	33,0	33,3
	6H	32,1	32,5	32,6	33,0	33,5	32,1	32,5	32,6	33,0	33,5
	8H	32,1	32,5	32,6	33,0	33,7	32,1	32,5	32,6	33,0	33,7
	12H	32,1	32,4	32,7	32,9	33,5	32,1	32,4	32,7	32,9	33,5
12H	4H	31,9	32,4	32,4	32,8	33,3	31,9	32,4	32,4	32,8	33,3
	6H	32,1	32,5	32,6	33,0	33,6	32,1	32,5	32,6	33,0	33,6
	8H	32,1	32,4	32,7	32,9	33,5	32,1	32,4	32,7	32,9	33,5

Variations with the observer position for the luminaire spacings, S:

S = 1.0H	0,5 / -0,8	0,5 / -0,8
S = 1.5H	1,4 / -1,6	1,4 / -1,6
S = 2.0H	2,5 / -2,8	2,5 / -2,8

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	106	106	106	102	102	102	100	100
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89
2	103	96	91	86	101	95	90	85	91	87	83	88	85	82	85	82	80	78
3	96	87	80	75	93	85	79	74	83	77	73	80	75	72	77	74	70	69
4	89	79	71	65	87	77	70	65	75	69	64	73	68	63	71	66	63	61
5	82	71	64	58	81	70	63	58	68	62	57	66	61	56	65	60	56	54
6	77	65	57	52	75	64	57	51	63	56	51	61	55	51	59	54	50	48
7	72	60	52	47	70	59	52	46	57	51	46	56	50	46	55	49	45	44
8	67	55	47	42	66	54	47	42	53	46	42	52	46	42	51	45	41	40
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38	47	42	38	36
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35	44	39	35	33

Light Measurement Report

Print date: 22-1-2025

Measurement date and time: 22-1-2025 14:17:00 – Measurement no. VFR-250122-3056-MS

Measurement tracking No. and Link: [VT250122-001102](https://www.viso-systems.com/VT250122-001102)


Operator:



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

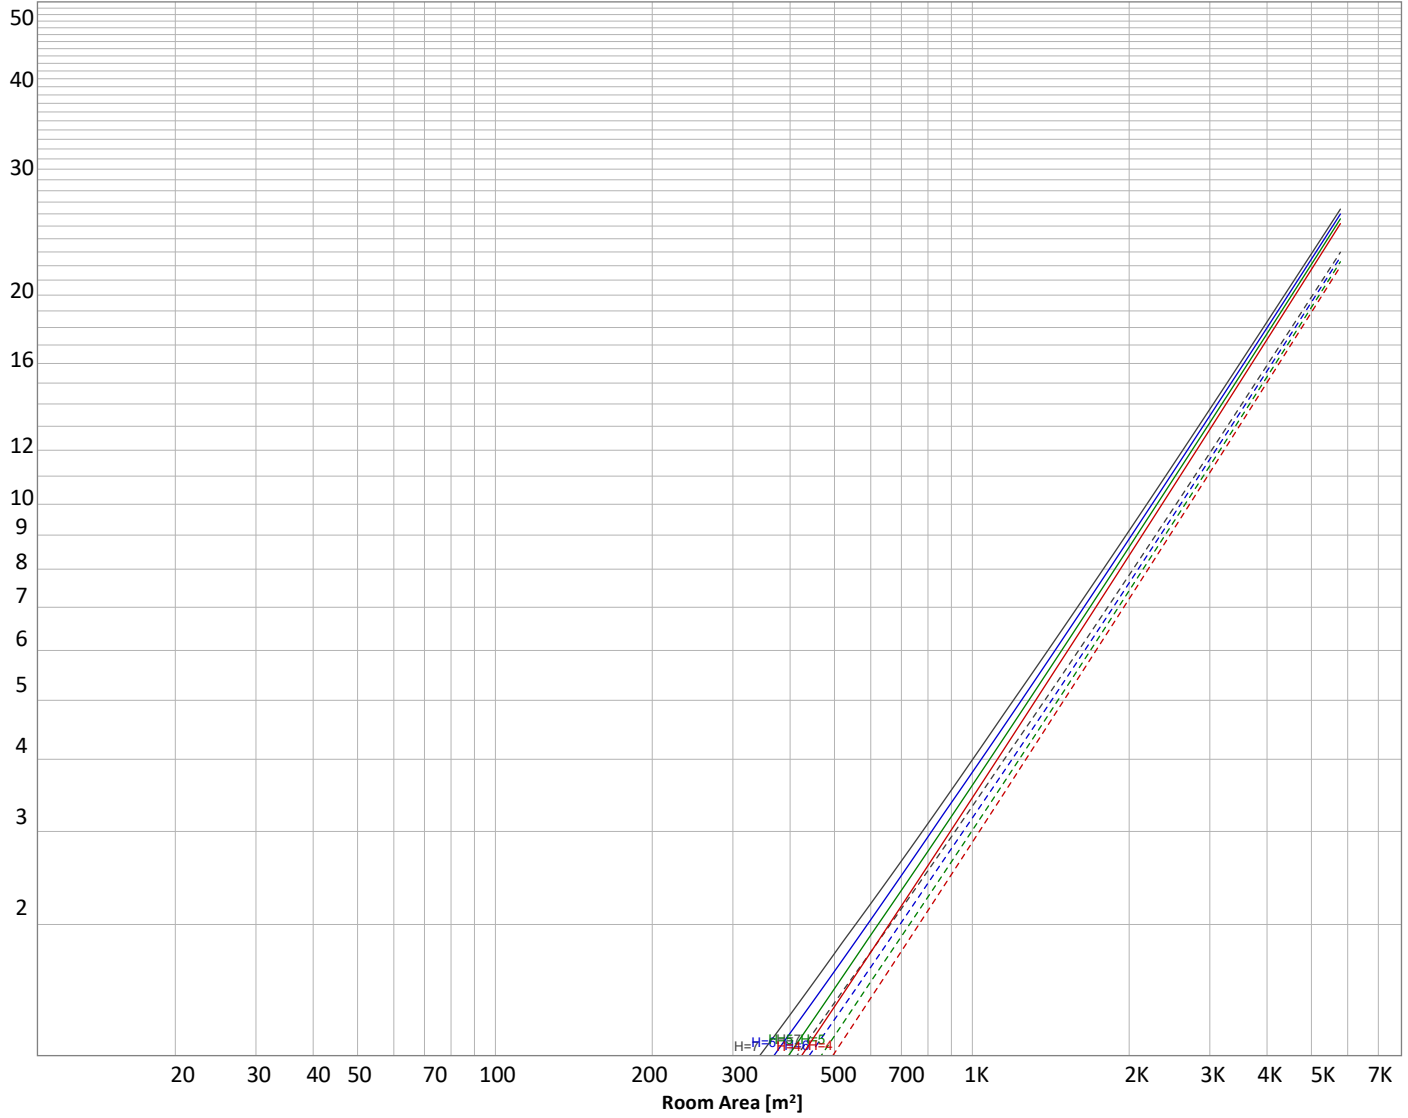

Conditions

H = Room height	Flux = 26447 lm				
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	ρ(%) Wall reflectance	Floor reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50	30
E _{work} = Average lux on work area =	100 lx	_____	50	30	20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
1221 lm	3634 lm	5761 lm	6361 lm	4471 lm	2779 lm	1511 lm	558 lm	106 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
3,23 lm	2,12 lm	4,13 lm	6,40 lm	7,84 lm	7,96 lm	6,96 lm	4,90 lm	1,83 lm

Light Measurement Report

Print date: 22-1-2025

Measurement date and time: 22-1-2025 14:17:00 – Measurement no. VFR-250122-3056-MS

Measurement tracking No. and Link: [VT250122-001102](https://www.viso-systems.com/VT250122-001102)

Operator:



Outdoor Light Planning

Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	1221 lm	4,6%
10-20°	3634 lm	13,7%
20-30°	5761 lm	21,8%
30-40°	6361 lm	24,1%
40-50°	4471 lm	16,9%
50-60°	2779 lm	10,5%
60-70°	1511 lm	5,7%
70-80°	558 lm	2,1%
80-90°	106 lm	0,4%
90-100°	3 lm	0,0%
100-110°	2 lm	0,0%
110-120°	4 lm	0,0%
120-130°	6 lm	0,0%
130-140°	8 lm	0,0%
140-150°	8 lm	0,0%
150-160°	7 lm	0,0%
160-170°	5 lm	0,0%
170-180°	2 lm	0,0%
Total	26447 lm	100,0%

Intensity peaks

Max intensity	12830 cd
Intensity, 90°	21 cd
Intensity, 0°	12795 cd

Zonal Lumen summary


Zone (γ)	Lumen	% Total
0-30°	10616 lm	40,1%
0-40°	16976 lm	64,2%
0-60°	24227 lm	91,6%
60-90°	2175 lm	8,2%
70-100°	667 lm	2,5%
90-120°	9 lm	0,0%
0-90°	26402 lm	99,8%
90-180°	45 lm	0,2%
0-180°	26447 lm	100,0%

BUG rating

	Lumen	% Total
Forward light		
Low(0-30°)	5290 lm	20,0%
Medium(30-60°)	6805 lm	25,7%
High(60-80°)	1047 lm	4,0%
Very high(80-90°)	58 lm	0,2%
Back light		
Low(0-30°)	5290 lm	20,0%
Medium(30-60°)	6805 lm	25,7%
High(60-80°)	1047 lm	4,0%
Very high(80-90°)	58 lm	0,2%
Uplight		
Low(90-100°)	5 lm	0,0%
High(100-180°)	42 lm	0,2%

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B5 U2 G1

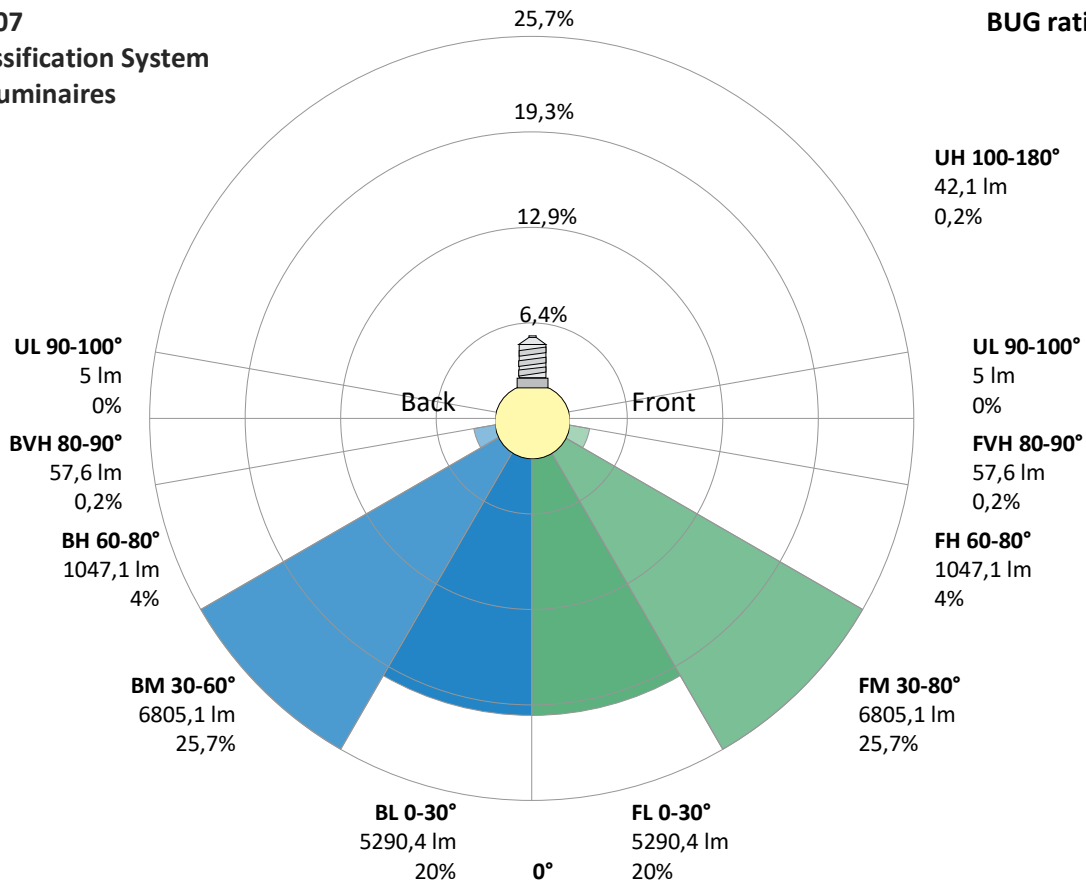

Light Measurement Report

Print date: 22-1-2025

Measurement date and time: 22-1-2025 14:17:00 – Measurement no. VFR-250122-3056-MS

Measurement tracking No. and Link: [VT250122-001102](#)

Operator:




Power Details


Input Power

Power feed to light source	198,5 W
Frequency of input power	50 Hz
RMS Input voltage feed, V_{RMS}	230 V
RMS Input current feed, I_{RMS}	0,869 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	199,74 VA
Displacement factor of AC power feed	1,0
Power factor of AC current feed	0,99
Total harmonic distortion of the current	7,68%
Total harmonic distortion of the voltage	0,09%

Input Power Curve

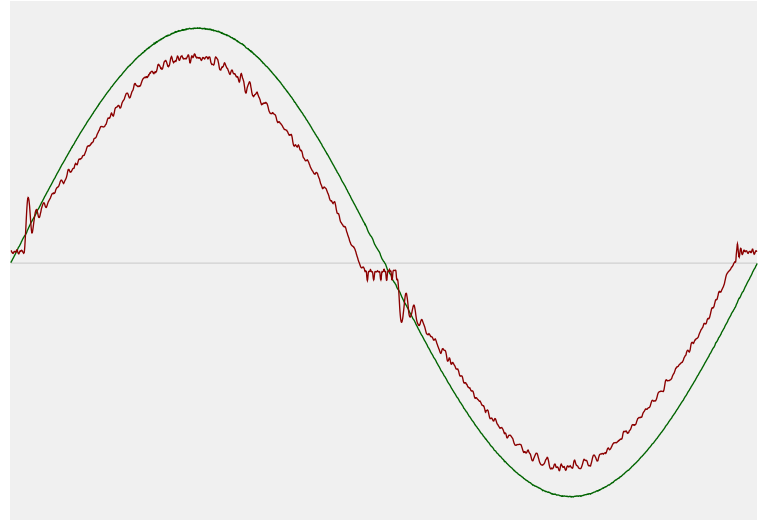

Efficiency

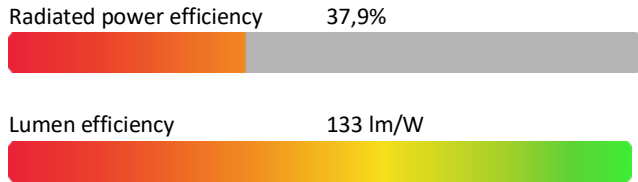

Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

Color Temperature Change

CCT start	3979 K
CCT shift	+21 K
CCT end	4000 K


Warmup Result

Total warmup time	Lamp stabilized in 17 min 51 sec
Warmup variation	-3,1%

Output Change

Output start	27282 lm
Output change	-834 lm
Output end	26447 lm

Stabilization Curve

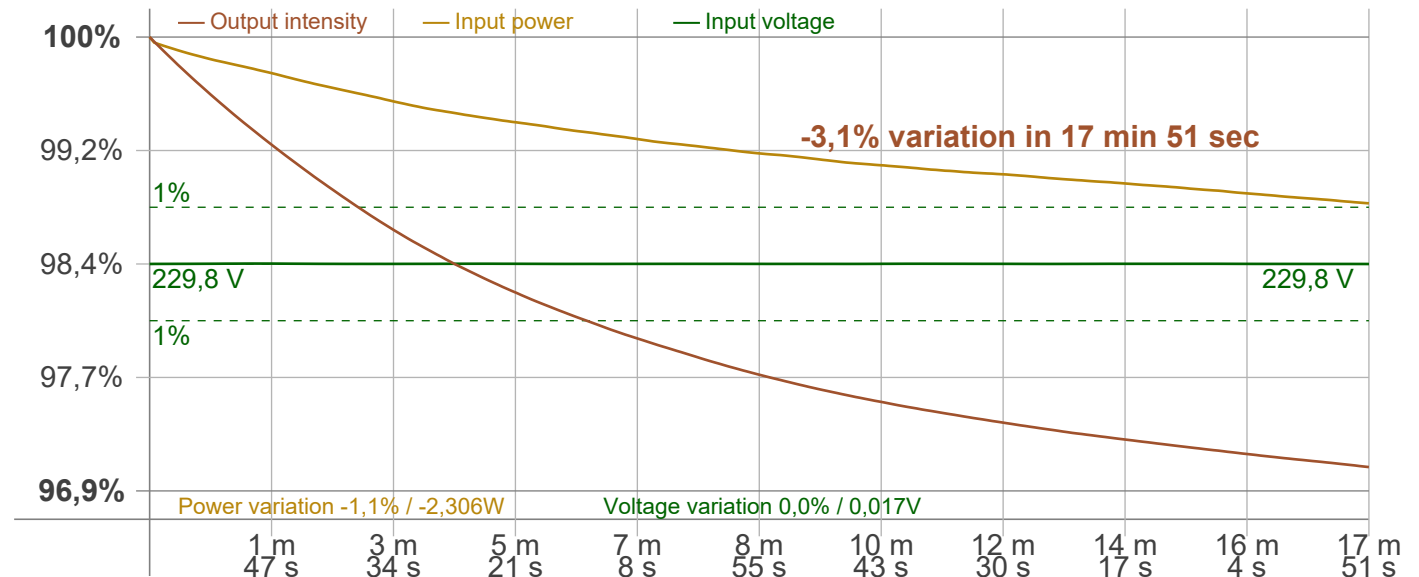

Light Measurement Report

Print date: 22-1-2025

Measurement date and time: 22-1-2025 14:17:00 – Measurement no. VFR-250122-3056-MS

Measurement tracking No. and Link: [VT250122-001102](https://www.viso-systems.com/VT250122-001102)

Operator:



Flicker /TLA details

Flicker Meter Type Viso Systems LabFlicker
 Frequency of input power 50 Hz
 Flicker/TLA sample rate 20000 samples/s

Measurement time
 PstLM 180 sec
 All other indices 1,2 sec

Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency 101,52 Hz
 Percent Flicker 0,36 %
 Flicker index 0

Flicker indices according to California Energy Commission (CEC) 2016b

JA8/10 40 Hz 0,06 %
 JA8/10 90 Hz 0,09 %
 JA8/10 200 Hz 0,34 %
 JA8/10 400 Hz 0,33 %
 JA8/10 1000 Hz 0,35 %


TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value (F < 80 Hz) 0,04
 SVM value (80 < F < 2000 Hz) 0,01


Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp 0,03

Flicker frame (frame of one flicker period in time domain)

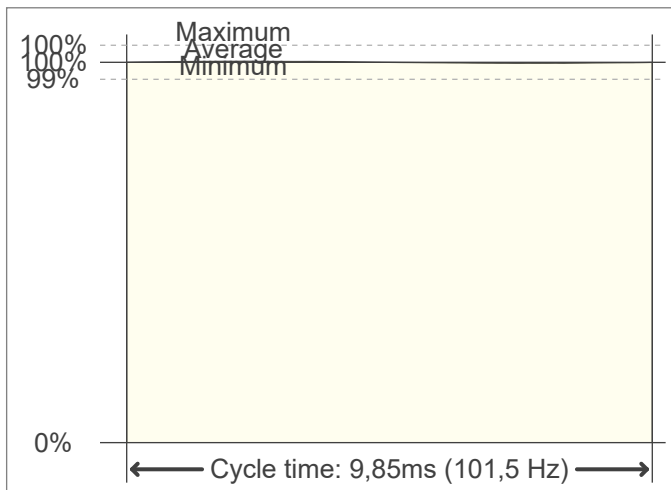

Flicker FFT (flicker curve in frequency domain)

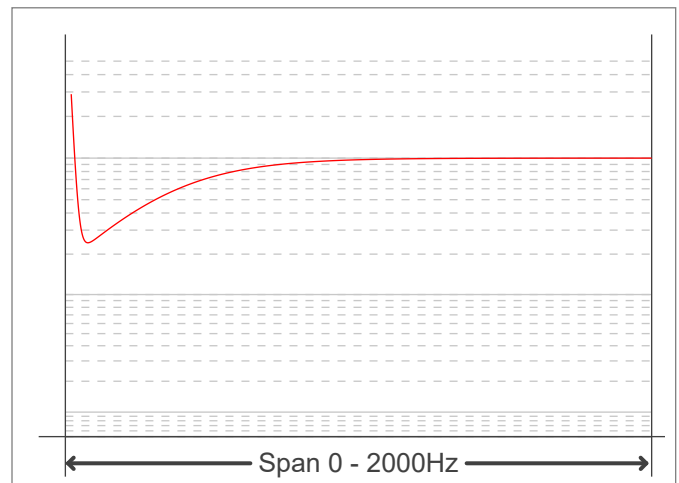

IEEE 1789 Frequency/modulation plot

