

Light Measurement Report

Print date: 11-11-2024

Measurement date and time: 11-11-2024 16:14:07 – Measurement no. VFR-241111-1987-MS

Measurement tracking No. and Link: [VT241111-009386](#)

Operator:



Laboratory and Equipment

Laboratory Owner and Location

Goniospectrometer System and Type

Sensor Name, Calibr. Date and Serial No.

Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark

LabSpion – Type C, horizontal

LabSensor Model2 – 11-1-2024 – 3130191315

Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution

γ (gamma)-Resolution

Test Distance

Input Power, Power and Displ. Factors

Input RMS Voltage and Current

Frequency of Input Power

Warm-up Time and Variation

12 planes – 30°

5°

1,99 m

1,5 W – PF 0,81 – DPF 0,99

230 V – 0,008 A

50 Hz

Lamp stabilized in 19 min 9 sec – 2,0%

Tested Light Source

Product Name

Item No. and Manufacturer

Product Description (line 1)

271487-2700K

271487-2700K – Dutchfulfillment

LED MINI INBOUWSPOT PHOBOS 1.5W DIM ZWART

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)

Efficiency

Peak Intensity and Beam Angle

Correlated Color Temperature, Target/Measured

Color Rendering Index

Color Rendering TM30-18

Color Shift, CIE duv and MacAdam Steps

Flicker

79,4 lm – 0,33% / 99,67%

52 lm/W

28,2 cd – 110,9°



CCT = 2700 K / 2676 K

CRI 82,9

R_f 85,8 – R_g 93,3

Duv 0,0023 – SDCM 3,0

SVM 0,36 – PstLM 0,11

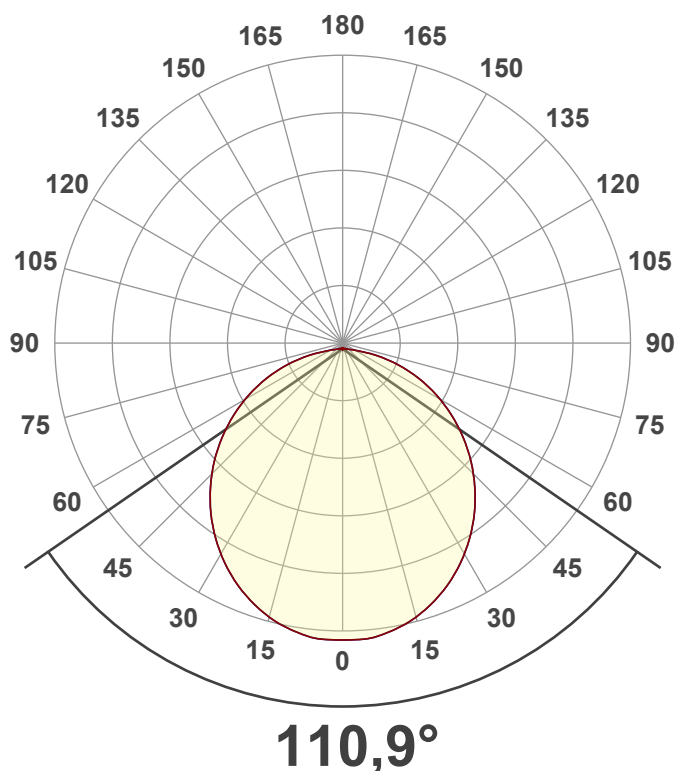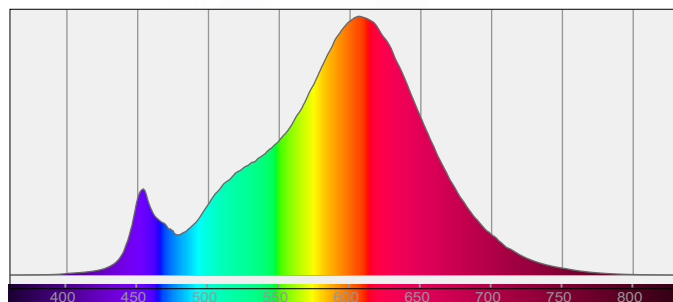

Light Measurement Report

Print date: 11-11-2024

Measurement date and time: 11-11-2024 16:14:07 – Measurement no. VFR-241111-1987-MS


Measurement tracking No. and Link: [VT241111-009386](#)

Operator:



Luminous Intensity diagram

Unit: 0-100% of peak intensity

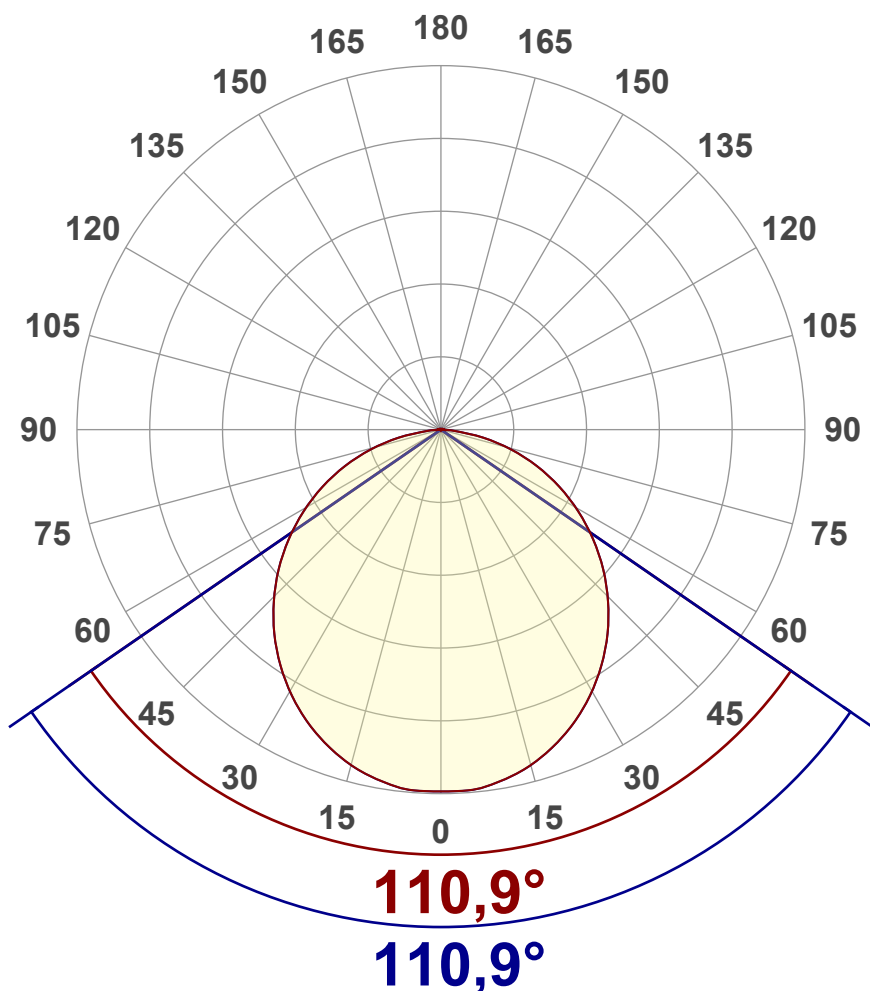

Main Values

Output (total Lumen)	79,4 lm
Lumen Up% / Down%	0,33% / 99,67%
Peak Intensity	28,2 cd
Beam Angle (50%)	110,9°
Beam Angle (90%)	110,9°
Beam Angle (10%)	110,9°

Cut-off Angle

Average 2,5%	172,7°
--------------	--------

Field Angle

Average 10%	160,9°
-------------	--------


Intensity Ratio

In 120° cone	78,7%
In 90° cone	53,7%

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

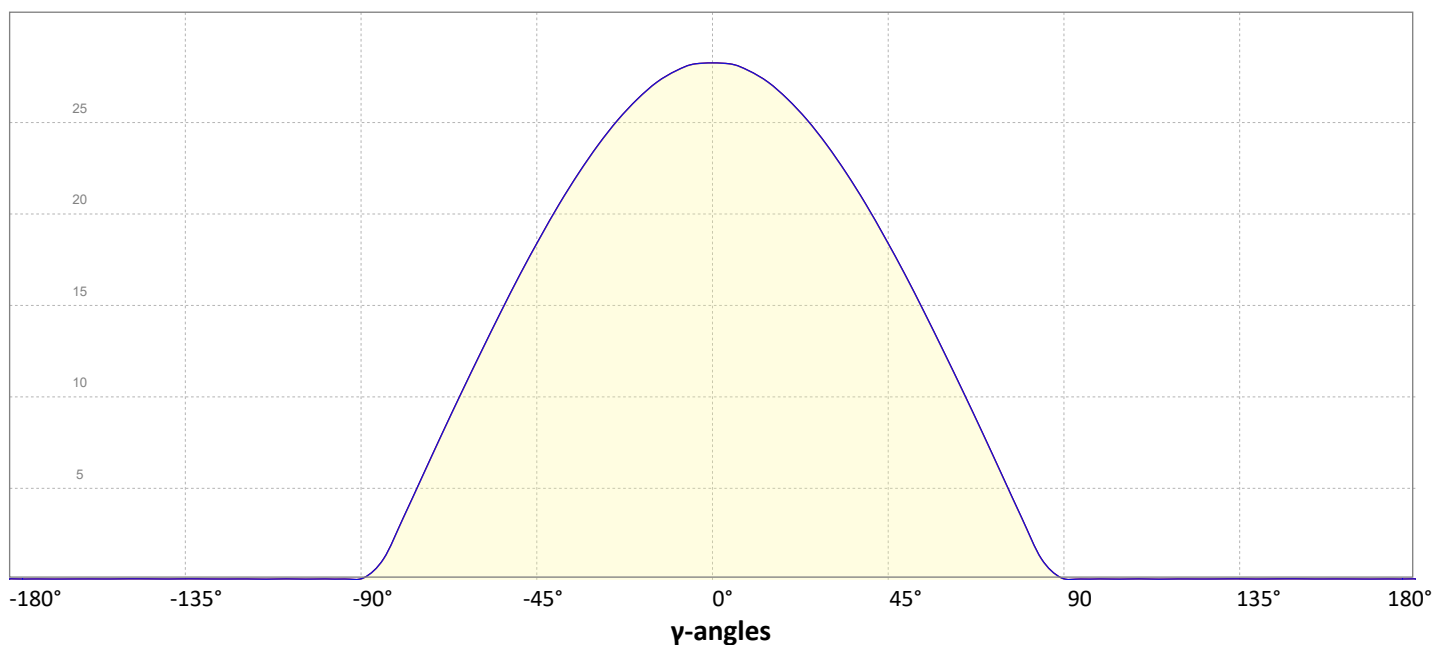


Light Measurement Report


Print date: 11-11-2024
Measurement date and time: 11-11-2024 16:14:07 – Measurement no. VFR-241111-1987-MS
Measurement tracking No. and Link: [VT241111-009386](#)
Operator:



Iso-intensity Diagram (Iso-candela)

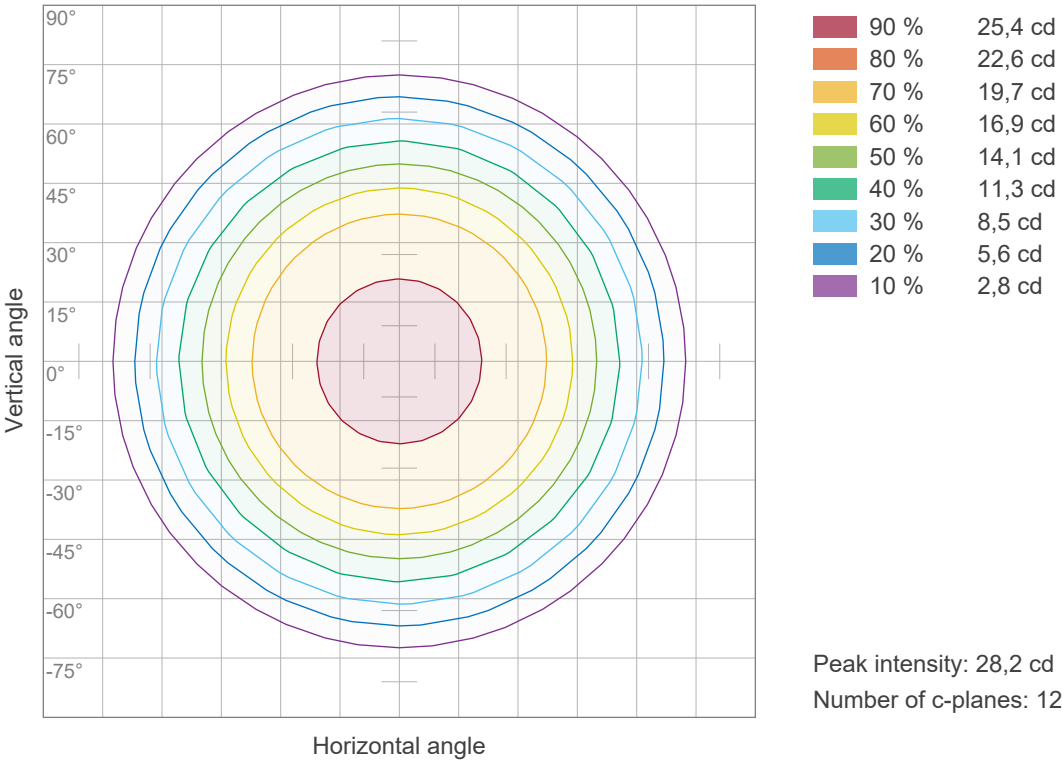

Iso-illuminance Diagram (Iso-lux)

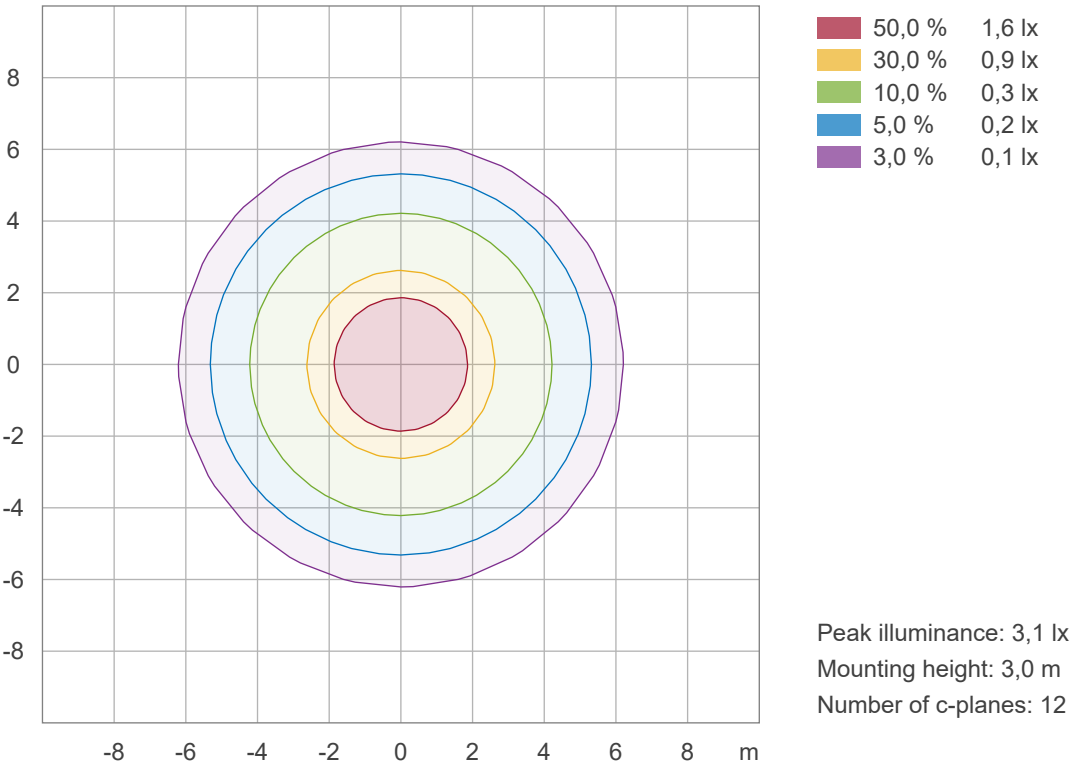

Light Measurement Report

Print date: 11-11-2024

Measurement date and time: 11-11-2024 16:14:07 – Measurement no. VFR-241111-1987-MS

Measurement tracking No. and Link: [VT241111-009386](#)

Operator:




Color details


Correlated Color Temperature, Target CCT = 2700 K
Correlated Color Temperature, Measured CCT = 2676 K
Color Rendering Index CRI 82,9
Color Rendering Index, R9 (red component) R9 = 7,2
Color Rendering TM30-18 R_f 85,8 – R_g 93,3
Color Quality Scale CQS = 83,1

MacAdam Steps
Color coordinates CIE 1931 (x;y) = (0,460;0,411)
Color coordinate CIEs 1960 (u;v) = (0,263;0,352)
Color deviation from BBL Duv = 0,0023
Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,263;0,527)


CIE 1931

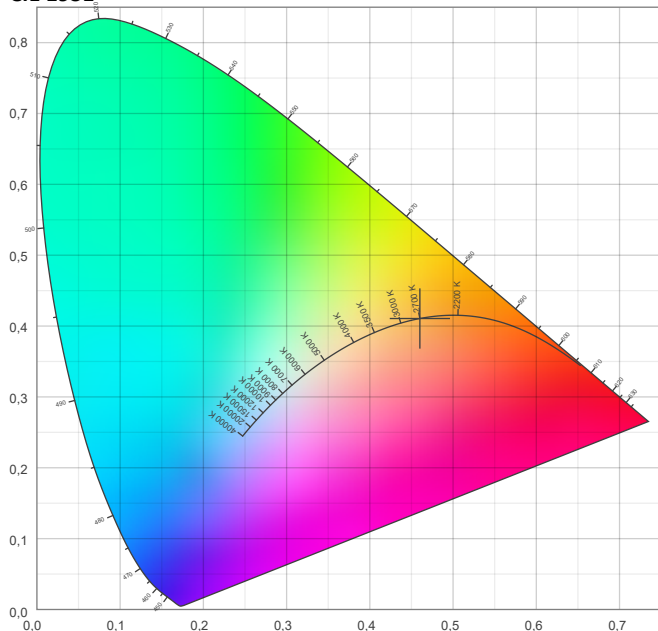

CIE 1931 – zoomed on Planckian locus

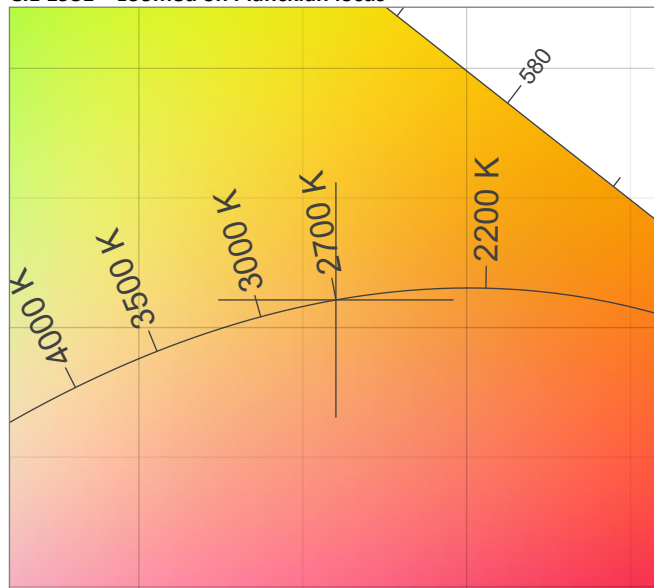


Color Rendering Index per reference color (CIE 1995)

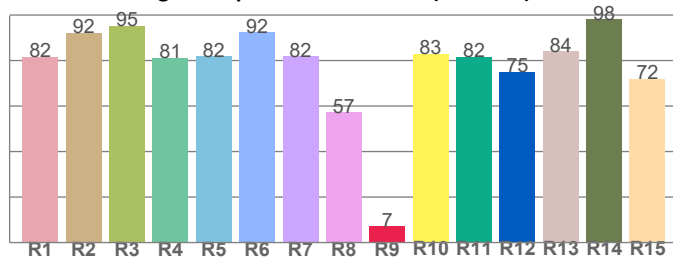


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81,6	92,2	95,3	81,2	81,8	92,4	81,8	57,3	7,2	83,0	81,7	75,0	84,2	98,1	72,0

Spectral power distribution (SPD) / W/nm – 0-100%

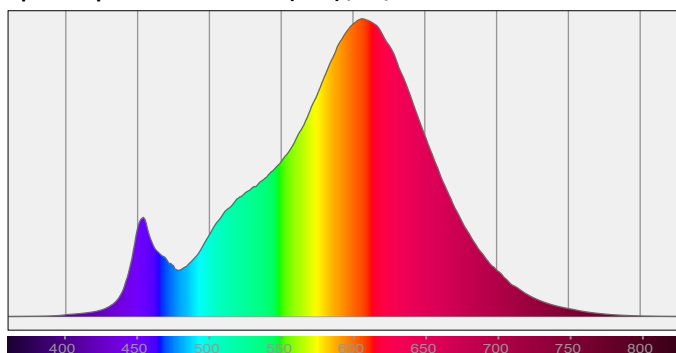


TM30-18 R_f-values per hue bin

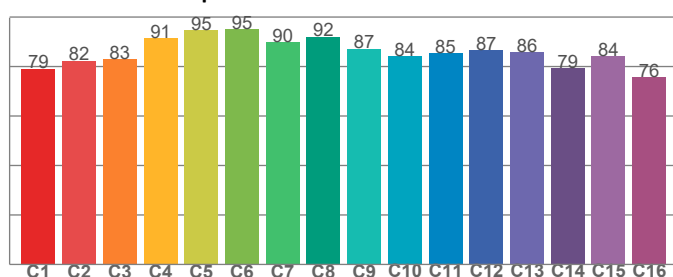

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79,1	82,3	82,9	91,4	94,7	95,0	89,9	92,1	87,2	84,2	85,3	86,6	85,9	79,3	84,2	75,7

Color Quality Scale by reference color

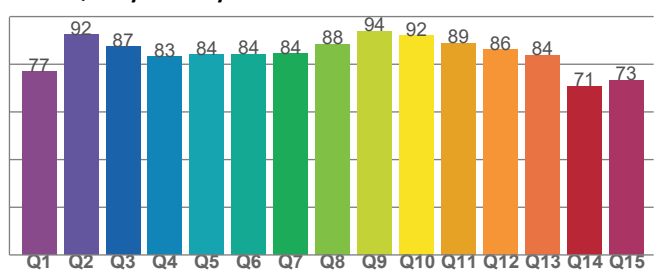

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
76,9	92,4	87,4	83,2	84,1	84,3	84,3	88,4	93,8	91,9	88,9	86,1	83,7	70,9	73,3

Light Measurement Report

Print date: 11-11-2024


Measurement date and time: 11-11-2024 16:14:07 – Measurement no. VFR-241111-1987-MS

Measurement tracking No. and Link: [VT241111-009386](#)

Operator:



Beam Details

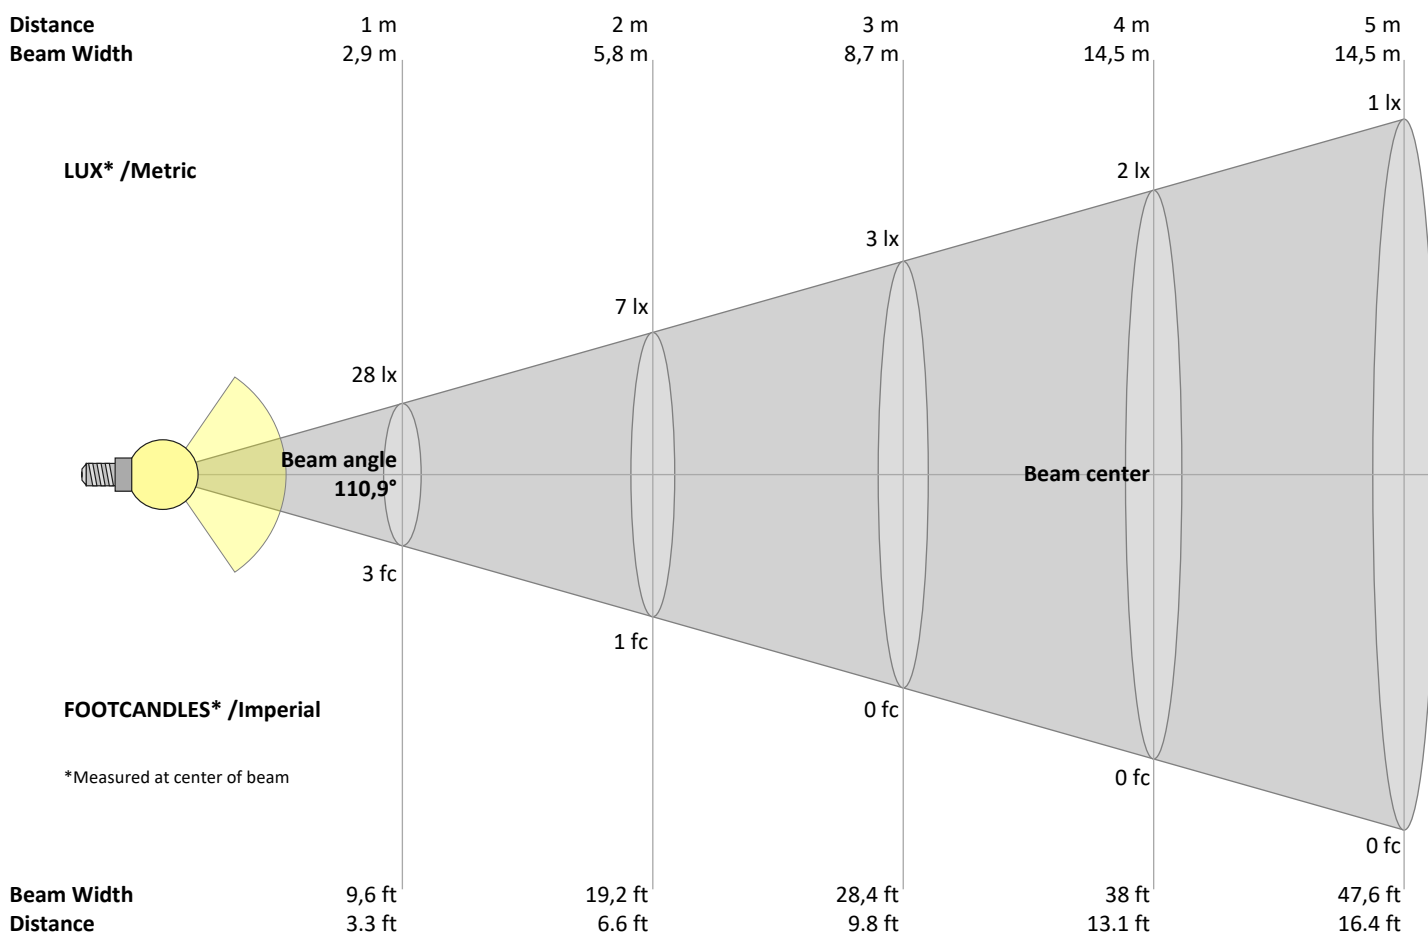

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
28	7	3	2	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	lux
2,6	0,7	0,3	0,2	0,1	0,1	0,1	0	0	0	0	0	0	0	0	0	0	0	0	0	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
28,2	28,2	27,7	27,1	26,1	24,9	23,5	22,0	20,3	18,4	16,4	14,3	12,1	9,9	7,6	5,3	3,0	1,0	0,1	0,0	cd
100%	100%	98%	96%	93%	88%	83%	78%	72%	65%	58%	51%	43%	35%	27%	19%	11%	3%	0%	0%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
28,2	28,2	27,7	27,1	26,1	24,9	23,5	22,0	20,3	18,4	16,4	14,3	12,1	9,9	7,6	5,3	3,0	1,0	0,1	0,0	cd
100%	100%	98%	96%	93%	88%	83%	78%	72%	65%	58%	51%	43%	35%	27%	19%	11%	3%	0%	0%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
28,2	28,2	27,7	27,1	26,1	24,9	23,5	22,0	20,3	18,4	16,4	14,3	12,1	9,9	7,6	5,3	3,0	1,0	0,1	0,0	cd
100%	100%	98%	96%	93%	88%	83%	78%	72%	65%	58%	51%	43%	35%	27%	19%	11%	3%	0%	0%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
28,2	28,2	27,7	27,1	26,1	24,9	23,5	22,0	20,3	18,4	16,4	14,3	12,1	9,9	7,6	5,3	3,0	1,0	0,1	0,0	cd
100%	100%	98%	96%	93%	88%	83%	78%	72%	65%	58%	51%	43%	35%	27%	19%	11%	3%	0%	0%	of 0°val

Light Measurement Report

Print date: 11-11-2024

Measurement date and time: 11-11-2024 16:14:07 – Measurement no. VFR-241111-1987-MS

Measurement tracking No. and Link: [VT241111-009386](#)

Operator:



Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances											
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size											
H = mounting height above eye level											
X	Y	Viewed Crosswise					Viewed Endwise				
		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
2H	2H	25,6	26,8	25,8	27,1	27,3	25,6	26,8	25,8	27,1	27,3
	3H	26,7	27,9	27,1	28,2	28,4	26,7	27,9	27,1	28,2	28,4
	4H	27,1	28,3	27,5	28,6	28,8	27,1	28,3	27,5	28,6	28,8
	6H	27,4	28,4	27,7	28,7	29,1	27,4	28,4	27,7	28,7	29,1
	8H	27,4	28,4	27,7	28,7	29,1	27,4	28,4	27,7	28,7	29,1
	12H	27,4	28,4	27,7	28,7	29,2	27,4	28,4	27,7	28,7	29,2
4H	2H	26,0	27,2	26,4	27,5	27,8	26,0	27,2	26,4	27,5	27,8
	3H	27,5	28,5	27,8	28,8	29,2	27,5	28,5	27,8	28,8	29,2
	4H	27,9	28,8	28,3	29,2	29,8	27,9	28,8	28,3	29,2	29,8
	6H	28,2	29,1	28,7	29,4	29,8	28,2	29,1	28,7	29,4	29,8
	8H	28,2	29,0	28,8	29,4	29,8	28,2	29,0	28,8	29,4	29,8
	12H	28,2	28,9	28,7	29,3	29,8	28,2	28,9	28,7	29,3	29,8
8H	4H	28,1	28,9	28,6	29,2	29,6	28,1	28,9	28,6	29,2	29,6
	6H	28,5	29,1	29,0	29,5	30,1	28,5	29,1	29,0	29,5	30,1
	8H	28,6	29,1	29,1	29,6	30,3	28,6	29,1	29,1	29,6	30,3
	12H	28,6	29,1	29,2	29,6	30,2	28,6	29,1	29,2	29,6	30,2
12H	4H	28,1	28,7	28,6	29,1	29,6	28,1	28,7	28,6	29,1	29,6
	6H	28,5	29,0	29,0	29,6	30,2	28,5	29,0	29,0	29,6	30,2
	8H	28,6	29,1	29,2	29,6	30,2	28,6	29,1	29,2	29,6	30,2
Variations with the observer position for the luminaire spacings, S:											
S = 1.0H				0,1 / -0,2				0,1 / -0,2			
S = 1.5H				0,3 / -0,5				0,3 / -0,5			
S = 2.0H				0,7 / -0,9				0,7 / -0,9			

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR		(RCR: Room Cavity Ratio)			Room Values are expressed as percentage of Lumen delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	106	106	106	102	102	102	100	
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	84
2	99	91	84	78	96	89	82	77	85	80	75	82	77	73	79	75	72	69
3	90	79	71	65	87	78	70	64	75	68	63	72	66	62	69	65	61	58
4	82	70	62	55	80	69	61	54	66	59	54	64	58	53	62	56	52	50
5	76	63	54	47	74	62	53	47	60	52	46	57	51	46	56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	50	44	40	38
7	65	51	42	36	63	50	42	36	49	41	36	47	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29	40	33	29	39	33	29	27
10	53	40	32	26	52	39	31	26	38	31	26	37	31	26	36	30	26	24

Light Measurement Report


Print date: 11-11-2024
Measurement date and time: 11-11-2024 16:14:07 – Measurement no. VFR-241111-1987-MS
Measurement tracking No. and Link: [VT241111-009386](#)
Operator:



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

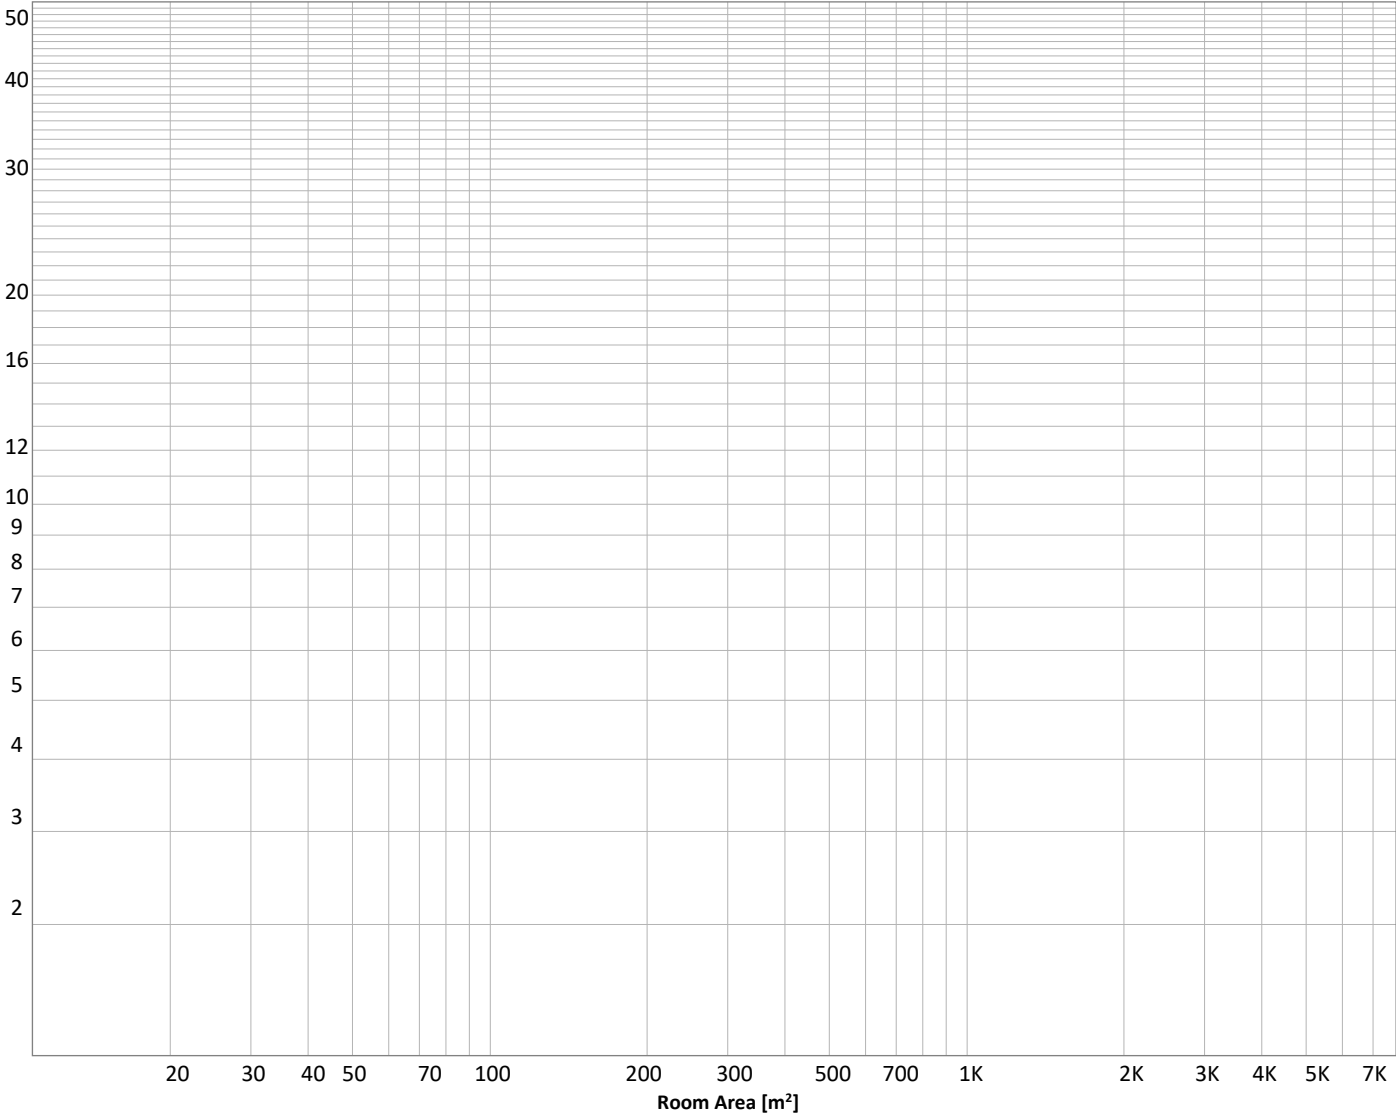

Conditions

H = Room height	Flux = 79,4 lm	p(%)		
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	Wall reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50
E _{work} = Average lux on work area =	100 lx	=====	50	30
				Floor reflectance
				20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
2,67 lm	7,63 lm	11,5 lm	13,7 lm	14,2 lm	12,8 lm	9,79 lm	5,61 lm	1,29 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,057 lm	0,041 lm	0,037 lm	0,036 lm	0,033 lm	0,028 lm	0,019 lm	0,011 lm	0,004 lm

Light Measurement Report

Print date: 11-11-2024

Measurement date and time: 11-11-2024 16:14:07 – Measurement no. VFR-241111-1987-MS

Measurement tracking No. and Link: [VT241111-009386](#)

Operator:



Outdoor Light Planning

Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	3 lm	3,4%
10-20°	8 lm	9,6%
20-30°	11 lm	14,5%
30-40°	14 lm	17,3%
40-50°	14 lm	17,8%
50-60°	13 lm	16,1%
60-70°	10 lm	12,3%
70-80°	6 lm	7,1%
80-90°	1 lm	1,6%
90-100°	0 lm	0,1%
100-110°	0 lm	0,1%
110-120°	0 lm	0,0%
120-130°	0 lm	0,0%
130-140°	0 lm	0,0%
140-150°	0 lm	0,0%
150-160°	0 lm	0,0%
160-170°	0 lm	0,0%
170-180°	0 lm	0,0%
Total	79 lm	100,0%

Intensity peaks

Max intensity	28 cd
Intensity, 90°	0 cd
Intensity, 0°	28 cd

Zonal Lumen summary

Zone (γ)	Lumen	% Total
0-30°	22 lm	27,4%
0-40°	36 lm	44,7%
0-60°	62 lm	78,7%
60-90°	17 lm	21,0%
70-100°	7 lm	8,8%
90-120°	0 lm	0,2%
0-90°	79 lm	99,7%
90-180°	0 lm	0,3%
0-180°	79 lm	100,0%

BUG rating

	Lumen	% Total
Forward light		
Low(0-30°)	11 lm	13,7%
Medium(30-60°)	20 lm	25,6%
High(60-80°)	8 lm	9,7%
Very high(80-90°)	1 lm	0,8%
Back light		
Low(0-30°)	11 lm	13,7%
Medium(30-60°)	20 lm	25,6%
High(60-80°)	8 lm	9,7%
Very high(80-90°)	1 lm	0,8%


Uplight

Low(90-100°)	0 lm	0,1%
High(100-180°)	0 lm	0,3%

IESNA TM-15-07

Luminaire Classification System For Outdoor Luminaires

BUG rating B0 U0 G0

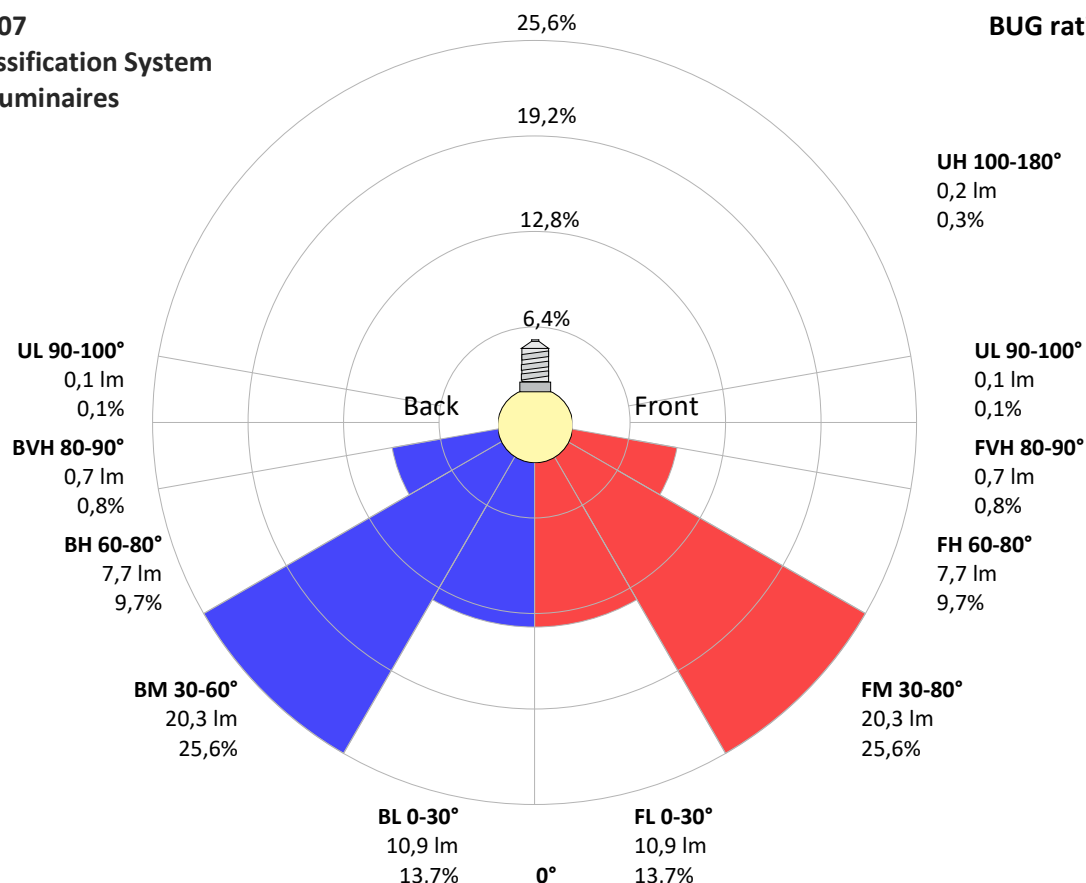

Light Measurement Report

Print date: 11-11-2024
Measurement date and time: 11-11-2024 16:14:07 – Measurement no. VFR-241111-1987-MS
Measurement tracking No. and Link: [VT241111-009386](#)
Operator:




Power Details


Input Power

Power feed to light source	1,5 W
Frequency of input power	50 Hz
RMS Input voltage feed, V_{RMS}	230 V
RMS Input current feed, I_{RMS}	0,008 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	1,89 VA
Displacement factor of AC power feed	0,99
Power factor of AC current feed	0,81
Total harmonic distortion of the current	71,69%
Total harmonic distortion of the voltage	0,07%

Input Power Curve

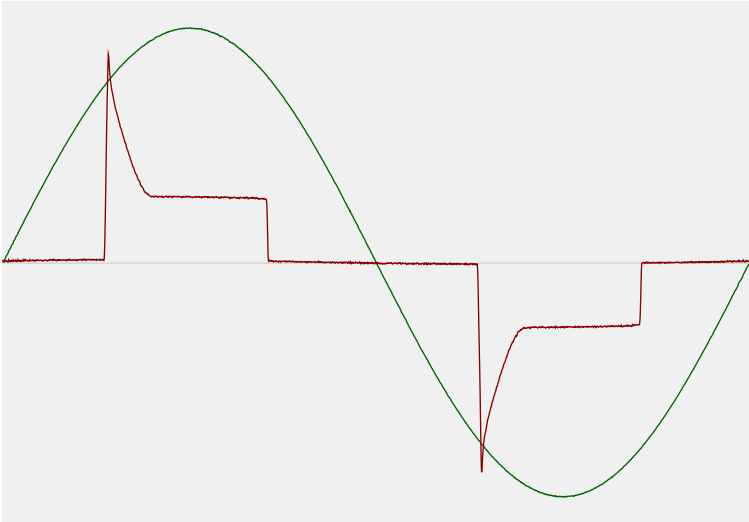

Efficiency

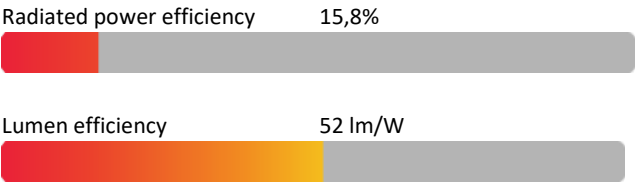

Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

Color Temperature Change

CCT start	2690 K
CCT shift	+10 K
CCT end	2700 K


Warmup Result

Total warmup time	Lamp stabilized in 19 min 9 sec
Warmup variation	-3,0%

Output Change

Output start	81,8 lm
Output change	-2,4 lm
Output end	79,4 lm

Stabilization Curve

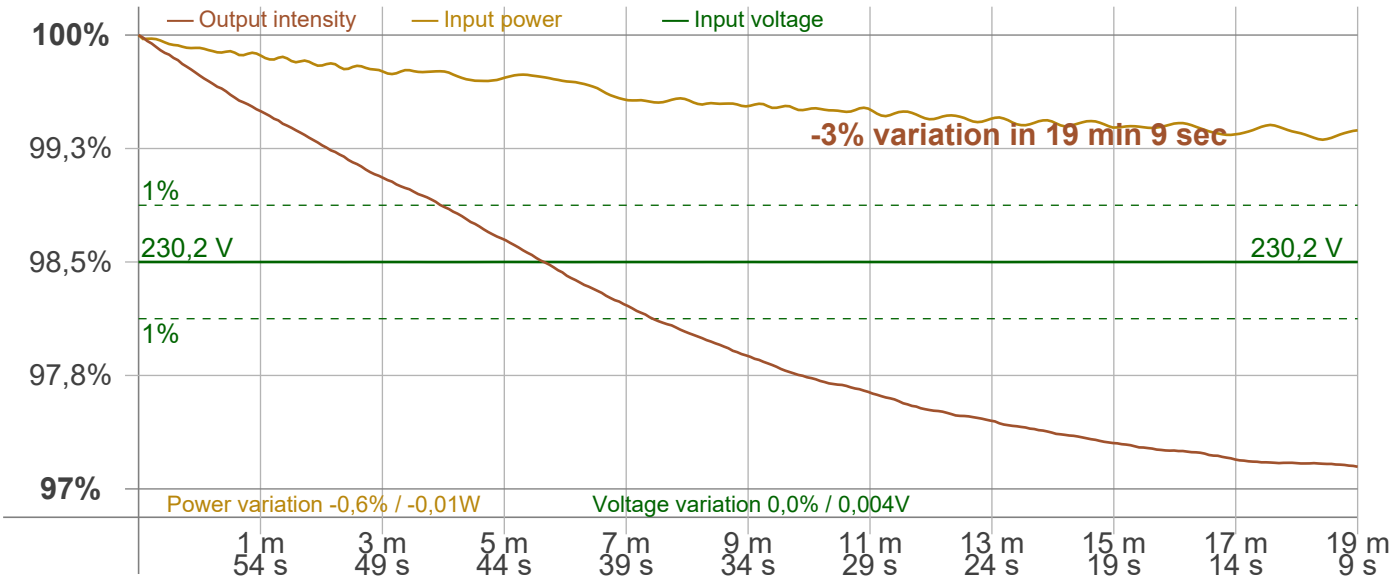

Light Measurement Report


Print date: 11-11-2024
Measurement date and time: 11-11-2024 16:14:07 – Measurement no. VFR-241111-1987-MS
Measurement tracking No. and Link: [VT241111-009386](#)
Operator:




Flicker /TLA details

Flicker Meter Type	Viso Systems LabFlicker	Measurement time	
Frequency of input power	50 Hz	PstLM	180 sec
Flicker/TLA sample rate	20000 samples/s	All other indices	1,2 sec
Flicker indices according to Illuminating Engineering Society (IES)		Flicker indices according to California Energy Commission (CEC) 2016b	
Flicker frequency	100 Hz	JA8/10 40 Hz	0,08 %
Percent Flicker	20,43 %	JA8/10 90 Hz	0,09 %
Flicker index	0,03	JA8/10 200 Hz	9,66 %
TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)		JA8/10 400 Hz	15,45 %
PstLM value (F < 80 Hz)	0,11	JA8/10 1000 Hz	19,62 %
SVM value (80 < F < 2000 Hz)	0,36	Flicker indices according to Lighting Research Center (2015)	
		Perception metric, Assist Mp	0,07

Flicker frame (frame of one flicker period in time domain)

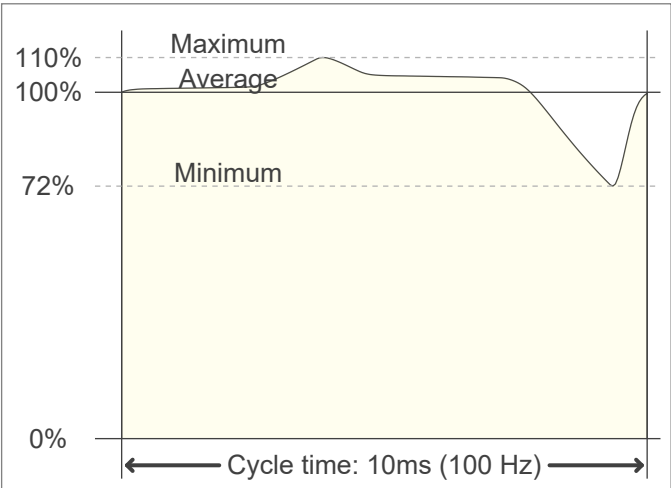

Flicker FFT (flicker curve in frequency domain)

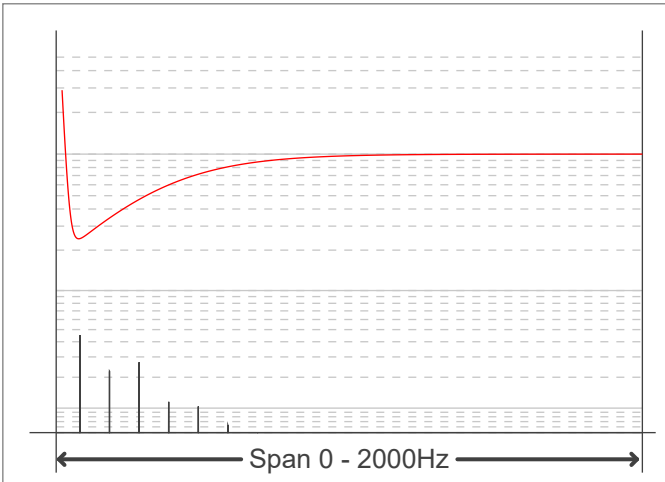

IEEE 1789 Frequency/modulation plot

